



WAMAK

Heat pump



TBW 73 EVI

WAMAK TBW 73 EVI

Product description

Heat pump with two power stages for heating and domestic hot water with the possibility of passive cooling control. One short closed refrigerant circuit with a pair of quiet Scroll compressors and robust stainless steel plate heat exchangers. Through the connection kit, the circulation pumps can be easily and quickly connected while externally controlling their variable speed.

Use for multi-family dwellings, suburban mixed-use buildings or commercial operations. The Urban range is based on a robust construction quality steel for all parts. High quality, long proven heat pump circuit components extend the life of the heat pump.

As a primary source, the thermal energy of the sun accumulated in the ground through a horizontal collector or geothermal energy through a deep borehole is used. In the collector or borehole, an antifreeze flows which takes the energy of the earth at a low temperature and the heat pump raises this temperature to a temperature usable for heating or hot water.

The EVI (Enhanced Vapour Injection) technology allows the heat pump to achieve higher header flow temperatures even at lower source temperatures. EVI also has a positive impact on the compressor lifespan and overall system stability because the discharge gas temperature from the compressor is lower.

The twin compressors give the system robustness and the ability to distribute the heat output according to the actual load.

Product features

- Scroll compressor
- EVI technology
- Asymetric plate heat exchanger
- Multi-stage capacity control
- High pressure switch
- Low pressure sensor - analogue
- Flow sensor consumer - analogue - (with accessory)
- Mixed heating/cooling circuit control
- DHW switching control
- Outdoor temperature sensor - (with accessory)
- Buffer temperature sensor - (with accessory)
- Modbus connection - (with accessory)
- Sylomer pads under compressor unit
- Electronic expansion valve
- Two-stage capacity control
- Phase and rotation control
- High pressure sensor - analogue
- Flow switch consumer - on/off - (with accessory)
- Flow switch source - on/off - (with accessory)
- Direct heating/cooling circuit control
- DHW circulation control
- DHW temperature sensor - (with accessory)
- Cascade control - (with accessory)
- Solid frame structure

Basic performance data - WAMAK TBW 73 EVI

Heating - EN 14511		
Heating capacity [kW]	B0 / W35 (max)	73.6 (36.8 / 73.6)
	B0 / W35 (min)	36.8 (36.8 / 73.6)
	B0 / W34	73.4 (36.7 / 73.4)
Electrical power input [kW]	B0 / W35 (max)	16.8 (8.3 / 16.8)
	B0 / W35 (min)	8.3 (8.3 / 16.8)
	B0 / W34	16.4 (8.1 / 16.4)
Heating efficiency faktor [COP]	B0 / W35 (max)	4.38
	B0 / W35 (min)	4.44
	B0 / W34	4.47
Seasonal space heating energy efficiency - SCOP EN 14825		
Average Climate / Low Temperature [35°C]	SCOP	4.94
	η [%]	197.5
	Label	A+++
	Qhe [kWh]	152057.6
	Pdesignh [kW]	73.6
	Tbivalent [°C]	-10
Cooling		
Cooling capacity - [kW]	A35 / W23-18	74.8
	A25 / W23-18	78.1
	A35 / W12-7	74.8
	A25 / W12-7	74.8
Seasonal space cooling energy efficiency - SEER EN 14825		
[W 23 / 18°C]	SEER	5.09
	Qce [kWh]	33420.0
	η_c [%]	203.5
Sound EN 12102		
Acoustic power - Lw	dB(A)	62.1
Acoustic pressure - Lp	1 m dB(A)	54.1
	5 m dB(A)	40.1
	10 m dB(A)	34.1
Mechanical and operational information		
Compressor type (3~ 400/50)	SCROLL / 2 /	On/Off
Refrigerant	R410A (GWP - 2088)	9.9 kg
Operating limit temperatures heating - (min / max) [°C]		25 / 65
Operating limit temperatures source - (min / max) [°C]		-10 (7) / 30
Weight		435 kg

WAMAK TBW 73 EVI

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 73 EVI
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	low (35 °C - 30 °C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	73.6	kW	Seasonal space heating energy efficiency	ηs	197.5	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	73.4	kW	Tj = -7 °C	COPd	4.47	-
Tj = +2 °C	Pdh	72.8	kW	Tj = +2 °C	COPd	4.9	-
Tj = +7 °C	Pdh	36.1	kW	Tj = +7 °C	COPd	5.2	-
Tj = +12 °C	Pdh	35.8	kW	Tj = +12 °C	COPd	5.6	-
Tj = bivalent temperature	Pdh	73.6	kW	Tj = bivalent temperature	COPd	4.4	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	14.3	kW
Standby mode	Psb	0.010	kW	Type of energy input		electricity	
Crankcase heater mode	Pck	0.000	kW				
Other items							
Capacity control		multi-stage		For air-to-water heat pumps: Rated air flow rate, outdoors	-	---	m3/h
Sound power level				For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	6.47 ~ 12.93	m3/h
indoors	Lwa	62	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	QHE	152057.6	kWh				

Contact details: WAMAK, s.r.o., Orovnic 252, 96652, Orovnic, Slovakia, info@wamak.sk

WAMAK TBW 73 EVI

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 73 EVI
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	middle (55 °C - 47 °C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	76.2	kW	Seasonal space heating energy efficiency	ηs	158.0	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	76.4	kW	Tj = -7 °C	COPd	3.23	-
Tj = +2 °C	Pdh	76.0	kW	Tj = +2 °C	COPd	4.1	-
Tj = +7 °C	Pdh	37.2	kW	Tj = +7 °C	COPd	4.5	-
Tj = +12 °C	Pdh	36.9	kW	Tj = +12 °C	COPd	4.9	-
Tj = bivalent temperature	Pdh	76.2	kW	Tj = bivalent temperature	COPd	2.8	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	14.3	kW
Standby mode	Psb	0.010	kW	Type of energy input		electricity	
Crankcase heater mode	Pck	0.000	kW				
Other items							
Capacity control		multi-stage		For air-to-water heat pumps: Rated air flow rate, outdoors	-	---	m3/h
Sound power level				For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	6.47 ~ 12.93	m3/h
indoors	Lwa	62	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	QHE	157429.2	kWh				

Contact details: WAMAK, s.r.o., Orovnic 252, 96652, Orovnic, Slovakia, info@wamak.sk



ENERG

енергия - ενεργεια



WAMAK

TBW 73 EVI



55 °C

35 °C

A+++

A+++

A+++

A++

A+

A

B

C

D



62 dB



--- dB

■ 81
■ 77
■ 75
kW

■ 76
■ 74
■ 70
kW



2019

811/2013

TBW 73 EVI

ErP Data

55 °C

35 °C

Energy class

A+++

A+++

η [%]

158.0

197.5

P_{rated} [kW]

77

74

Q_{HE} [kWh/y]

157430

152058

SCOP [-]

3.95

4.94

$T_{bivalent}$ [°C]

-10

-10

CONTROLLER



+ QAA55/75

class VII

3.5% ↓

- QAA55/75

class III

1.5% ↓

Heating performance data

Version: v2024.004-BW-WW

Source - Brine [0°C] / Low Temperature [35°C]

ZHI35K1P-TFD_R410A_2_BWW

Operating conditions		Qh	P	COP
1	B0 / W30-35	73.6	16.8	4.38
2	B0 / W30-35 (MIN)	36.8	8.3	4.44
A	B0 / Wxx-34	73.4	16.4	4.47
B	B0 / Wxx-30	72.8	15.0	4.85
C	B0 / Wxx-27	36.1	6.9	5.24
D	B0 / Wxx-24	35.8	6.4	5.59
E	B0 / Wxx-35	73.6	16.8	4.38
F	B0 / Wxx-35	73.6	16.8	4.38

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Low Temperature [35°C]	
SCOPon	4.94
SCOPnet	4.94
SCOP	4.94
η [%]	197.51
Label	A+++
Qh [kWh]	152058
Pdesignh [kW]	73.6
Tbivalent [°C]	-10

Source - Brine [0°C] / Medium Temperature [55°C]

Operating conditions		Qh	P	COP
1	B0 / W47-55	76.2	27.0	2.83
2	B0 / W47-55 (MIN)	38.1	13.1	2.86
A	B0 / Wxx-52	76.4	24.4	3.23
B	B0 / Wxx-42	76.0	18.9	4.08
C	B0 / Wxx-36	37.2	8.2	4.54
D	B0 / Wxx-30	36.9	7.4	4.99
E	B0 / Wxx-55	76.2	27.0	2.83
F	B0 / Wxx-54	76.6	25.1	3.06

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Medium Temperature [55°C]	
SCOPon	3.95
SCOPnet	3.95
SCOP	3.95
η [%]	158.00
Label	A+++
Qh [kWh]	157429
Pdesignh [kW]	76.2
Tbivalent [°C]	-10

Source - Water [10°C] / Low Temperature [35°C]

Operating conditions		Qh	P	COP
1	W10 / W30-35	93.0	16.5	5.62
2	W10 / W30-35 (MIN)	46.5	8.2	5.70
A	W10 / Wxx-34	92.8	16.1	5.76
B	W10 / Wxx-30	92.2	14.5	6.38
C	W10 / Wxx-27	45.8	6.6	7.00
D	W10 / Wxx-24	45.5	6.0	7.61
E	W10 / Wxx-35	93.0	16.5	5.62
F	W10 / Wxx-35	93.0	16.5	5.62

SCOP DATA EN 14825:2018	
Source - Water [10°C] / Low Temperature [35°C]	
SCOPon	6.52
SCOPnet	6.52
SCOP	6.51
η [%]	260.52
Label	A+++
Qh [kWh]	192138
Pdesignh [kW]	93.0
Tbivalent [°C]	-10.00

Source - Water [10°C] / Medium Temperature [55°C]

Operating conditions		Qh	P	COP
1	W10 / W47-55	94.8	27.5	3.44
2	W10 / W47-55 (MIN)	47.4	13.6	3.49
A	W10 / Wxx-52	95.4	24.9	3.84
B	W10 / Wxx-42	94.5	18.8	5.03
C	W10 / Wxx-36	47.0	8.0	5.85
D	W10 / Wxx-30	46.6	7.1	6.56
E	W10 / Wxx-55	94.8	27.5	3.44
F	W10 / Wxx-55	94.8	27.5	3.44

SCOP DATA EN 14825:2018
Source - Water [10°C] / Medium Temperature [55°C]

SCOPon	4.91
SCOPnet	4.91
SCOP	4.90
η [%]	196.17
Label	A+++
Qh [kWh]	195857
Pdesignh [kW]	94.8
Tbivalent [°C]	-10.00

Low temperature cooling W 12 / 7°C

Operating conditions		Qc	P	EER
A	W30-35 / W12-7	57.1	18.0	3.18
B	W26-xx / W12-7	58.1	16.4	3.53
C	W22-xx / W12-7	58.8	15.0	3.92
D	W18-xx / W12-7	59.1	14.3	4.13

SEER DATA EN 14825:2018 [W 12 / 7°C]

SEERon	3.80
SEER	3.80
Qc [kWh]	33420
η [%]	151.96

Radiant cooling W 23 / 18°C

Operating conditions		Qc	P	EER
A	W50-xx / W23-18	67.3	29.1	2.31
B	W40-xx / W23-18	72.7	22.7	3.20
C	W30-35 / W23-18	76.6	18.0	4.26
D	W26-xx / W23-18	77.8	16.4	4.73


SEER DATA EN 14825:2018 [W 23 / 18°C]

SEERon	5.09
SEER	5.09
Qc [kWh]	33420
η [%]	203.47

Performance lines - heating


ZHI35K1P-TFD_R410A_2_BWW

Qh-nom-35 Qh-min-35 Qh-max-65 Qh-nom-45 Qh-nom-55
Qh-nom-65

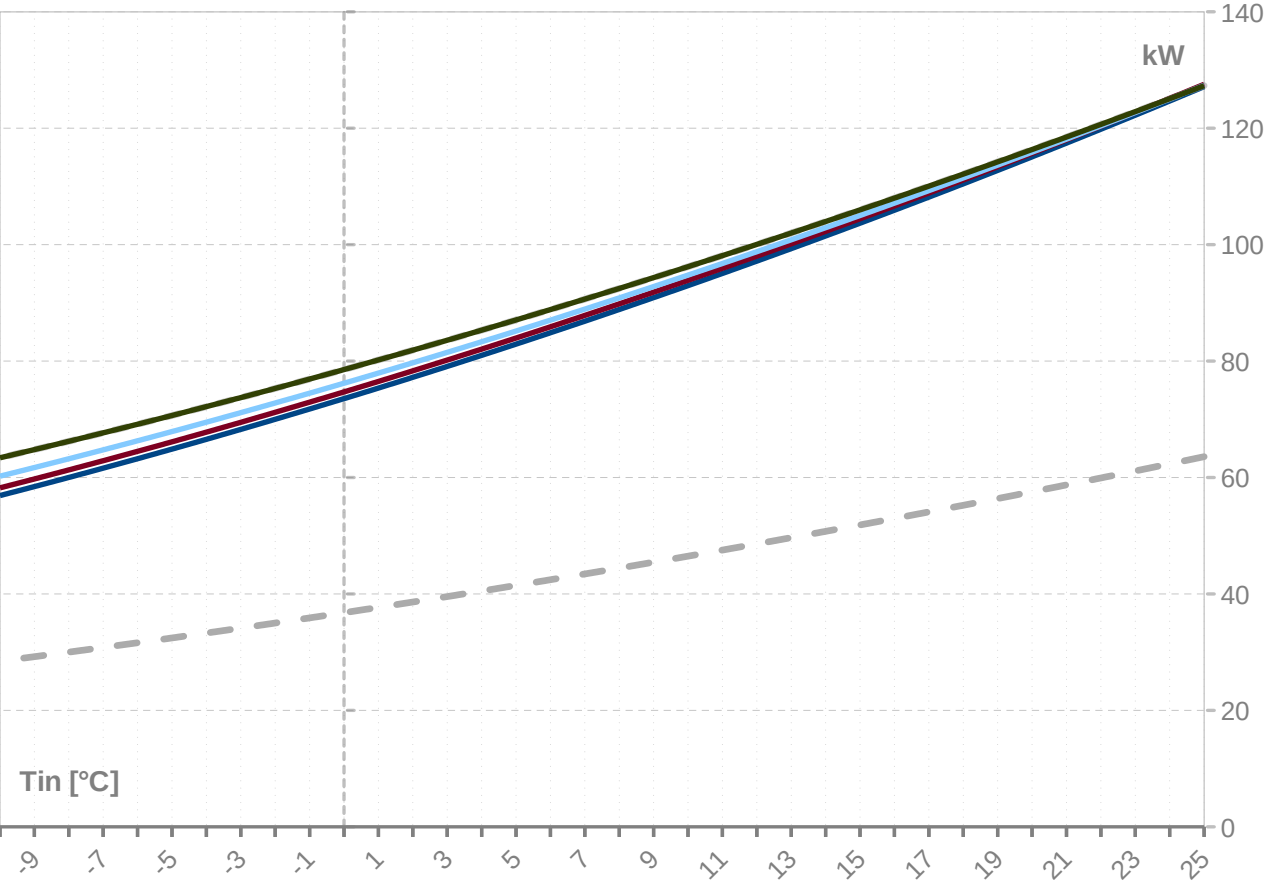

Performance lines - cooling

Qc-nom-12-7 Qc-nom-23-18

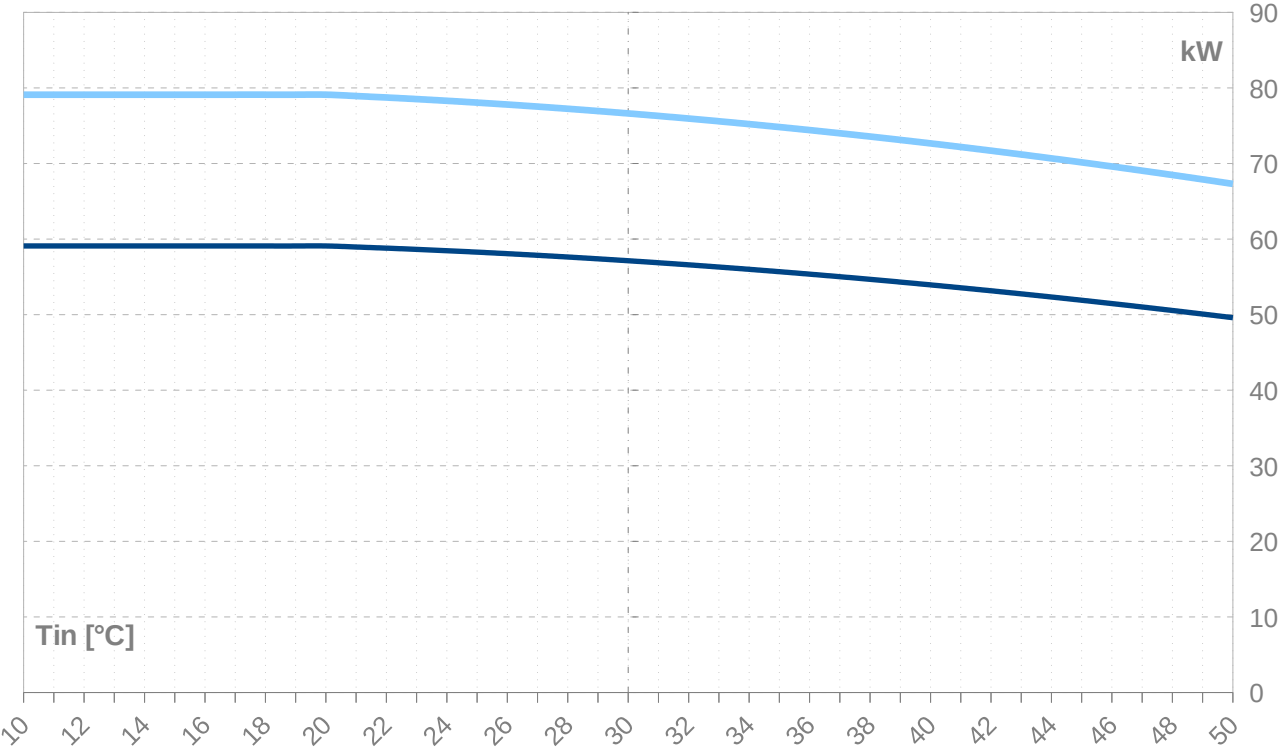

Th -OU	35										
Ts -IN	Qh nom	Qh min	Qh max	Pin nom	Pin min	Pin max	COP nom	Qc nom	Qc min	Qc max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
25	127.1	63.6	127.1	14.6	7.2	14.6	8.70	113.5	56.7	113.5	40.1
24	124.7	62.3	124.7	14.8	7.3	14.8	8.42	110.8	55.4	110.8	40.3
23	122.2	61.1	122.2	15.0	7.4	15.0	8.14	108.2	54.1	108.2	40.4
22	119.8	59.9	119.8	15.2	7.5	15.2	7.89	105.6	52.8	105.6	40.6
21	117.4	58.7	117.4	15.4	7.6	15.4	7.65	103.1	51.6	103.1	40.8
20	115.1	57.5	115.1	15.5	7.7	15.5	7.42	100.6	50.3	100.6	40.9
19	112.8	56.4	112.8	15.7	7.7	15.7	7.20	98.1	49.1	98.1	41.1
18	110.4	55.2	110.4	15.8	7.8	15.8	6.99	95.7	47.8	95.7	41.2
17	108.2	54.1	108.2	15.9	7.9	15.9	6.79	93.3	46.6	93.3	41.3
16	105.9	53.0	105.9	16.0	7.9	16.0	6.60	90.9	45.5	90.9	41.5
15	103.7	51.8	103.7	16.1	8.0	16.1	6.42	88.6	44.3	88.6	41.6
14	101.5	50.7	101.5	16.2	8.0	16.2	6.25	86.3	43.2	86.3	41.7
13	99.3	49.7	99.3	16.3	8.1	16.3	6.08	84.1	42.0	84.1	41.8
12	97.2	48.6	97.2	16.4	8.1	16.4	5.92	81.9	40.9	81.9	41.9
11	95.1	47.5	95.1	16.5	8.1	16.5	5.77	79.7	39.8	79.7	41.9
10	93.0	46.5	93.0	16.5	8.2	16.5	5.62	77.5	38.8	77.5	42.0
9	90.9	45.5	90.9	16.6	8.2	16.6	5.48	75.4	37.7	75.4	42.1
8	88.9	44.4	88.9	16.6	8.2	16.6	5.34	73.3	36.7	73.3	42.1
7	86.9	43.4	86.9	16.7	8.2	16.7	5.21	71.3	35.6	71.3	42.2
6	84.9	42.4	84.9	16.7	8.2	16.7	5.08	69.3	34.6	69.3	42.2
5	82.9	41.5	82.9	16.7	8.3	16.7	4.95	67.3	33.6	67.3	42.3
4	81.0	40.5	81.0	16.8	8.3	16.8	4.83	65.3	32.7	65.3	42.3
3	79.1	39.5	79.1	16.8	8.3	16.8	4.71	63.4	31.7	63.4	42.4
2	77.2	38.6	77.2	16.8	8.3	16.8	4.60	61.5	30.8	61.5	42.4
1	75.4	37.7	75.4	16.8	8.3	16.8	4.48	59.7	29.8	59.7	42.4
0	73.6	36.8	73.6	16.8	8.3	16.8	4.38	57.9	28.9	57.9	42.4
-1	71.8	35.9	71.8	16.8	8.3	16.8	4.27	56.1	28.0	56.1	42.4
-2	70.0	35.0	70.0	16.8	8.3	16.8	4.16	54.3	27.1	54.3	42.4
-3	68.3	34.1	68.3	16.8	8.3	16.8	4.06	52.6	26.3	52.6	42.4
-4	66.6	33.3	66.6	16.8	8.3	16.8	3.96	50.9	25.4	50.9	42.5
-5	64.9	32.4	64.9	16.8	8.3	16.8	3.86	49.2	24.6	49.2	42.4
-6	63.2	31.6	63.2	16.8	8.3	16.8	3.77	47.5	23.8	47.5	42.4
-7	61.6	30.8	61.6	16.8	8.3	16.8	3.67	45.9	23.0	45.9	42.4
-8	60.0	30.0	60.0	16.8	8.3	16.8	3.58	44.3	22.2	44.3	42.4
-9	58.4	29.2	58.4	16.8	8.3	16.8	3.49	42.8	21.4	42.8	42.4
-10	56.9	28.4	56.9	16.7	8.3	16.7	3.40	41.3	20.6	41.3	42.4
-11	55.4	27.7	55.4	16.7	8.3	16.7	3.31	39.8	19.9	39.8	42.4
-12	53.9	26.9	53.9	16.7	8.2	16.7	3.22	38.3	19.1	38.3	42.4
-13	52.4	26.2	52.4	16.7	8.2	16.7	3.14	36.8	18.4	36.8	42.3
-14	51.0	25.5	51.0	16.7	8.2	16.7	3.05	35.4	17.7	35.4	42.3
-15	49.6	24.8	49.6	16.7	8.2	16.7	2.97	34.0	17.0	34.0	42.3

-- attention: operating limits not reflected in performance table

ZHI35K1P-TFD_R410A_2_BWW

Th -OU	45										
Th -IN	Qh nom	Qh min	Qh max	Pin nom	Pin min	Pin max	COP nom	Qc nom	Qc min	Qc max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
25	127.5	63.8	127.5	20.2	10.0	20.2	6.31	108.7	54.3	108.7	44.9
24	125.1	62.6	125.1	20.3	10.0	20.3	6.16	106.1	53.1	106.1	45.0
23	122.7	61.4	122.7	20.4	10.1	20.4	6.00	103.6	51.8	103.6	45.1
22	120.3	60.2	120.3	20.5	10.1	20.5	5.86	101.2	50.6	101.2	45.2
21	118.0	59.0	118.0	20.6	10.2	20.6	5.72	98.7	49.4	98.7	45.3
20	115.7	57.8	115.7	20.7	10.2	20.7	5.59	96.3	48.2	96.3	45.3
19	113.4	56.7	113.4	20.8	10.2	20.8	5.46	94.0	47.0	94.0	45.4
18	111.1	55.6	111.1	20.8	10.3	20.8	5.33	91.6	45.8	91.6	45.4
17	108.9	54.4	108.9	20.9	10.3	20.9	5.21	89.4	44.7	89.4	45.5
16	106.6	53.3	106.6	20.9	10.3	20.9	5.09	87.1	43.5	87.1	45.5
15	104.5	52.2	104.5	21.0	10.3	21.0	4.98	84.9	42.4	84.9	45.5
14	102.3	51.1	102.3	21.0	10.4	21.0	4.87	82.7	41.3	82.7	45.6
13	100.1	50.1	100.1	21.0	10.4	21.0	4.76	80.5	40.3	80.5	45.6
12	98.0	49.0	98.0	21.0	10.4	21.0	4.66	78.4	39.2	78.4	45.6
11	95.9	48.0	95.9	21.1	10.4	21.1	4.56	76.3	38.1	76.3	45.6
10	93.9	46.9	93.9	21.1	10.4	21.1	4.46	74.2	37.1	74.2	45.6
9	91.8	45.9	91.8	21.1	10.4	21.1	4.36	72.2	36.1	72.2	45.6
8	89.8	44.9	89.8	21.1	10.4	21.1	4.27	70.2	35.1	70.2	45.6
7	87.8	43.9	87.8	21.1	10.4	21.1	4.17	68.2	34.1	68.2	45.6
6	85.9	42.9	85.9	21.0	10.4	21.0	4.08	66.2	33.1	66.2	45.6
5	84.0	42.0	84.0	21.0	10.4	21.0	3.99	64.3	32.2	64.3	45.6
4	82.1	41.0	82.1	21.0	10.4	21.0	3.91	62.4	31.2	62.4	45.6
3	80.2	40.1	80.2	21.0	10.3	21.0	3.82	60.6	30.3	60.6	45.5
2	78.3	39.2	78.3	21.0	10.3	21.0	3.74	58.8	29.4	58.8	45.5
1	76.5	38.3	76.5	20.9	10.3	20.9	3.66	57.0	28.5	57.0	45.5
0	74.7	37.4	74.7	20.9	10.3	20.9	3.57	55.2	27.6	55.2	45.4
-1	72.9	36.5	72.9	20.9	10.3	20.9	3.49	53.4	26.7	53.4	45.4
-2	71.2	35.6	71.2	20.8	10.3	20.8	3.42	51.7	25.9	51.7	45.4
-3	69.5	34.7	69.5	20.8	10.3	20.8	3.34	50.0	25.0	50.0	45.3
-4	67.8	33.9	67.8	20.8	10.2	20.8	3.26	48.4	24.2	48.4	45.3
-5	66.1	33.1	66.1	20.7	10.2	20.7	3.19	46.8	23.4	46.8	45.2
-6	64.5	32.2	64.5	20.7	10.2	20.7	3.11	45.1	22.6	45.1	45.2
-7	62.9	31.4	62.9	20.7	10.2	20.7	3.04	43.6	21.8	43.6	45.1
-8	61.3	30.6	61.3	20.7	10.2	20.7	2.97	42.0	21.0	42.0	45.1
-9	59.7	29.9	59.7	20.6	10.2	20.6	2.90	40.5	20.2	40.5	45.1
-10	58.2	29.1	58.2	20.6	10.2	20.6	2.83	39.0	19.5	39.0	45.0
-11	56.7	28.4	56.7	20.6	10.1	20.6	2.76	37.5	18.7	37.5	45.0
-12	55.2	27.6	55.2	20.6	10.1	20.6	2.69	36.0	18.0	36.0	44.9
-13	53.8	26.9	53.8	20.5	10.1	20.5	2.62	34.6	17.3	34.6	44.9
-14	52.4	26.2	52.4	20.5	10.1	20.5	2.55	33.2	16.6	33.2	44.8
-15	51.0	25.5	51.0	20.5	10.1	20.5	2.48	31.8	15.9	31.8	44.8

-- attention: operating limits not reflected in performance table

Th -OU	55										
	[°C]										
Ts -IN	Qh nom	Qh min	Qh max	Pin nom	Pin min	Pin max	COP nom	Qc nom	Qc min	Qc max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
25	127.4	63.7	127.4	27.7	13.7	27.7	4.59	101.5	50.7	101.5	52.0
24	125.0	62.5	125.0	27.8	13.7	27.8	4.50	99.1	49.5	99.1	52.0
23	122.7	61.3	122.7	27.8	13.7	27.8	4.41	96.7	48.4	96.7	52.0
22	120.4	60.2	120.4	27.8	13.7	27.8	4.33	94.4	47.2	94.4	52.0
21	118.1	59.1	118.1	27.8	13.7	27.8	4.24	92.1	46.1	92.1	52.0
20	115.9	57.9	115.9	27.8	13.7	27.8	4.16	89.9	44.9	89.9	52.0
19	113.7	56.8	113.7	27.8	13.7	27.8	4.08	87.7	43.8	87.7	52.0
18	111.5	55.7	111.5	27.8	13.7	27.8	4.01	85.5	42.7	85.5	52.0
17	109.3	54.6	109.3	27.8	13.7	27.8	3.93	83.3	41.7	83.3	51.9
16	107.1	53.6	107.1	27.8	13.7	27.8	3.86	81.2	40.6	81.2	51.9
15	105.0	52.5	105.0	27.8	13.7	27.8	3.78	79.1	39.5	79.1	51.9
14	102.9	51.5	102.9	27.7	13.7	27.7	3.71	77.0	38.5	77.0	51.8
13	100.8	50.4	100.8	27.7	13.7	27.7	3.64	75.0	37.5	75.0	51.8
12	98.8	49.4	98.8	27.6	13.6	27.6	3.57	73.0	36.5	73.0	51.8
11	96.8	48.4	96.8	27.6	13.6	27.6	3.51	71.0	35.5	71.0	51.7
10	94.8	47.4	94.8	27.5	13.6	27.5	3.44	69.0	34.5	69.0	51.7
9	92.8	46.4	92.8	27.5	13.6	27.5	3.37	67.1	33.6	67.1	51.6
8	90.9	45.4	90.9	27.4	13.5	27.4	3.31	65.2	32.6	65.2	51.5
7	88.9	44.5	88.9	27.4	13.5	27.4	3.25	63.4	31.7	63.4	51.5
6	87.0	43.5	87.0	27.3	13.5	27.3	3.18	61.5	30.8	61.5	51.4
5	85.2	42.6	85.2	27.3	13.5	27.3	3.12	59.7	29.8	59.7	51.3
4	83.3	41.7	83.3	27.2	13.4	27.2	3.06	57.9	29.0	57.9	51.3
3	81.5	40.8	81.5	27.2	13.4	27.2	3.00	56.1	28.1	56.1	51.2
2	79.7	39.9	79.7	27.1	13.4	27.1	2.94	54.4	27.2	54.4	51.1
1	77.9	39.0	77.9	27.0	13.3	27.0	2.88	52.7	26.3	52.7	51.1
0	76.2	38.1	76.2	27.0	13.3	27.0	2.83	51.0	25.5	51.0	51.0
-1	74.5	37.2	74.5	26.9	13.3	26.9	2.77	49.4	24.7	49.4	50.9
-2	72.8	36.4	72.8	26.9	13.2	26.9	2.71	47.7	23.9	47.7	50.9
-3	71.1	35.6	71.1	26.8	13.2	26.8	2.65	46.1	23.1	46.1	50.8
-4	69.5	34.7	69.5	26.8	13.2	26.8	2.60	44.5	22.3	44.5	50.7
-5	67.9	33.9	67.9	26.7	13.2	26.7	2.54	43.0	21.5	43.0	50.6
-6	66.3	33.2	66.3	26.7	13.1	26.7	2.49	41.4	20.7	41.4	50.6
-7	64.7	32.4	64.7	26.6	13.1	26.6	2.43	39.9	19.9	39.9	50.5
-8	63.2	31.6	63.2	26.6	13.1	26.6	2.38	38.4	19.2	38.4	50.4
-9	61.7	30.9	61.7	26.5	13.1	26.5	2.33	36.9	18.5	36.9	50.4
-10	60.2	30.1	60.2	26.5	13.1	26.5	2.27	35.5	17.7	35.5	50.3
-11	58.8	29.4	58.8	26.5	13.1	26.5	2.22	34.0	17.0	34.0	50.2
-12	57.3	28.7	57.3	26.5	13.0	26.5	2.17	32.6	16.3	32.6	50.2
-13	55.9	28.0	55.9	26.4	13.0	26.4	2.12	31.3	15.6	31.3	50.1
-14	54.6	27.3	54.6	26.4	13.0	26.4	2.06	29.9	14.9	29.9	50.1
-15	53.2	26.6	53.2	26.4	13.0	26.4	2.01	28.5	14.3	28.5	50.0

-- attention: operating limits not reflected in performance table

Th -OU	65 (T-max)										
Ts -IN	Qh nom	Qh min	Qh max	Pin nom	Pin min	Pin max	COP nom	Qc nom	Qc min	Qc max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
25	127.3	63.7	127.3	36.9	18.2	36.9	3.45	92.9	46.4	92.9	63.2
24	125.1	62.5	125.1	36.9	18.2	36.9	3.39	90.7	45.3	90.7	63.2
23	122.9	61.4	122.9	36.8	18.2	36.8	3.34	88.5	44.2	88.5	63.1
22	120.7	60.3	120.7	36.8	18.1	36.8	3.28	86.3	43.2	86.3	63.0
21	118.5	59.2	118.5	36.7	18.1	36.7	3.23	84.2	42.1	84.2	63.0
20	116.3	58.2	116.3	36.6	18.1	36.6	3.18	82.1	41.1	82.1	62.9
19	114.2	57.1	114.2	36.6	18.0	36.6	3.12	80.1	40.0	80.1	62.8
18	112.1	56.1	112.1	36.5	18.0	36.5	3.07	78.0	39.0	78.0	62.8
17	110.1	55.0	110.1	36.4	18.0	36.4	3.02	76.0	38.0	76.0	62.7
16	108.0	54.0	108.0	36.3	17.9	36.3	2.97	74.1	37.0	74.1	62.6
15	106.0	53.0	106.0	36.3	17.9	36.3	2.92	72.1	36.1	72.1	62.5
14	104.0	52.0	104.0	36.2	17.8	36.2	2.87	70.2	35.1	70.2	62.4
13	102.0	51.0	102.0	36.1	17.8	36.1	2.83	68.3	34.2	68.3	62.4
12	100.0	50.0	100.0	36.0	17.8	36.0	2.78	66.4	33.2	66.4	62.3
11	98.1	49.1	98.1	35.9	17.7	35.9	2.73	64.6	32.3	64.6	62.2
10	96.2	48.1	96.2	35.8	17.7	35.8	2.69	62.8	31.4	62.8	62.1
9	94.3	47.2	94.3	35.7	17.6	35.7	2.64	61.0	30.5	61.0	62.0
8	92.5	46.2	92.5	35.6	17.6	35.6	2.60	59.2	29.6	59.2	61.9
7	90.7	45.3	90.7	35.5	17.5	35.5	2.55	57.5	28.7	57.5	61.8
6	88.9	44.4	88.9	35.4	17.5	35.4	2.51	55.8	27.9	55.8	61.7
5	87.1	43.5	87.1	35.4	17.4	35.4	2.46	54.1	27.0	54.1	61.6
4	85.3	42.7	85.3	35.3	17.4	35.3	2.42	52.4	26.2	52.4	61.6
3	83.6	41.8	83.6	35.2	17.3	35.2	2.38	50.7	25.4	50.7	61.5
2	81.9	40.9	81.9	35.1	17.3	35.1	2.33	49.1	24.6	49.1	61.4
1	80.2	40.1	80.2	35.0	17.3	35.0	2.29	47.5	23.8	47.5	61.3
0	78.5	39.3	78.5	34.9	17.2	34.9	2.25	45.9	23.0	45.9	61.2
-1	76.9	38.5	76.9	34.9	17.2	34.9	2.21	44.4	22.2	44.4	61.1
-2	75.3	37.7	75.3	34.8	17.2	34.8	2.17	42.8	21.4	42.8	61.0
-3	73.7	36.9	73.7	34.7	17.1	34.7	2.12	41.3	20.7	41.3	60.9
-4	72.2	36.1	72.2	34.6	17.1	34.6	2.08	39.8	19.9	39.8	60.9
-5	70.6	35.3	70.6	34.6	17.1	34.6	2.04	38.3	19.2	38.3	60.8
-6	69.1	34.6	69.1	34.5	17.0	34.5	2.00	36.9	18.4	36.9	60.7
-7	67.7	33.8	67.7	34.5	17.0	34.5	1.96	35.5	17.7	35.5	60.6
-8	66.2	33.1	66.2	34.4	17.0	34.4	1.92	34.1	17.0	34.1	60.6
-9	64.8	32.4	64.8	34.4	17.0	34.4	1.88	32.7	16.3	32.7	60.5
-10	63.4	31.7	63.4	34.4	17.0	34.4	1.84	31.3	15.6	31.3	60.4
-11	62.0	31.0	62.0	34.4	16.9	34.4	1.81	29.9	15.0	29.9	60.4
-12	60.7	30.3	60.7	34.3	16.9	34.3	1.77	28.6	14.3	28.6	60.3
-13	59.3	29.7	59.3	34.3	16.9	34.3	1.73	27.3	13.6	27.3	60.3
-14	58.0	29.0	58.0	34.3	16.9	34.3	1.69	26.0	13.0	26.0	60.2
-15	56.8	28.4	56.8	34.3	16.9	34.3	1.65	24.7	12.3	24.7	60.2

-- attention: operating limits not reflected in performance table






Tc -OU		W 12 / 7 °C									
Ts -IN	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
40	53.9	27.0	53.9	22.7	11.2	22.7	2.38	75.1	37.6	75.1	46.9
39	54.3	27.2	54.3	22.2	10.9	22.2	2.45	75.0	37.5	75.0	46.4
38	54.7	27.3	54.7	21.7	10.7	21.7	2.52	74.9	37.4	74.9	46.0
37	55.0	27.5	55.0	21.1	10.4	21.1	2.60	74.8	37.4	74.8	45.6
36	55.4	27.7	55.4	20.7	10.2	20.7	2.68	74.6	37.3	74.6	45.3
35	55.7	27.8	55.7	20.2	10.0	20.2	2.76	74.5	37.3	74.5	44.9
34	56.0	28.0	56.0	19.7	9.7	19.7	2.84	74.4	37.2	74.4	44.6
33	56.3	28.1	56.3	19.3	9.5	19.3	2.92	74.3	37.1	74.3	44.2
32	56.6	28.3	56.6	18.8	9.3	18.8	3.00	74.2	37.1	74.2	43.9
31	56.9	28.4	56.9	18.4	9.1	18.4	3.09	74.1	37.0	74.1	43.6
30	57.1	28.6	57.1	18.0	8.9	18.0	3.18	73.9	37.0	73.9	43.3
29	57.4	28.7	57.4	17.6	8.7	17.6	3.26	73.8	36.9	73.8	43.0
28	57.6	28.8	57.6	17.2	8.5	17.2	3.35	73.7	36.8	73.7	42.7
27	57.9	28.9	57.9	16.8	8.3	16.8	3.44	73.6	36.8	73.6	42.4
26	58.1	29.0	58.1	16.4	8.1	16.4	3.53	73.4	36.7	73.4	42.1
25	58.3	29.1	58.3	16.1	7.9	16.1	3.63	73.3	36.6	73.3	41.8
24	58.5	29.2	58.5	15.7	7.7	15.7	3.72	73.1	36.6	73.1	41.5
23	58.6	29.3	58.6	15.4	7.6	15.4	3.82	73.0	36.5	73.0	41.2
22	58.8	29.4	58.8	15.0	7.4	15.0	3.92	72.8	36.4	72.8	40.8
21	58.9	29.5	58.9	14.7	7.2	14.7	4.02	72.6	36.3	72.6	40.4
20	59.1	29.5	59.1	14.3	7.1	14.3	4.13	72.5	36.2	72.5	40.0

Tc [°C]		W 23 / 18 °C									
0	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
40	72.7	36.3	72.7	22.7	11.2	22.7	3.20	94.2	47.1	95.1	47.3
39	73.1	36.6	73.1	22.2	10.9	22.2	3.30	94.1	47.0	95.0	46.8
38	73.6	36.8	73.6	21.7	10.7	21.7	3.40	94.0	47.0	94.9	46.3
37	74.0	37.0	74.0	21.1	10.4	21.1	3.50	93.9	47.0	94.8	45.8
36	74.4	37.2	74.4	20.7	10.2	20.7	3.60	93.8	46.9	94.7	45.4
35	74.8	37.4	74.8	20.2	10.0	20.2	3.71	93.8	46.9	94.6	45.0
34	75.2	37.6	75.2	19.7	9.7	19.7	3.81	93.7	46.8	94.5	44.6
33	75.6	37.8	75.6	19.3	9.5	19.3	3.92	93.6	46.8	94.4	44.2
32	75.9	38.0	75.9	18.8	9.3	18.8	4.03	93.5	46.7	94.3	43.8
31	76.3	38.1	76.3	18.4	9.1	18.4	4.14	93.4	46.7	94.2	43.5
30	76.6	38.3	76.6	18.0	8.9	18.0	4.26	93.3	46.7	94.2	43.1
29	76.9	38.5	76.9	17.6	8.7	17.6	4.37	93.2	46.6	94.1	42.7
28	77.2	38.6	77.2	17.2	8.5	17.2	4.49	93.1	46.5	94.0	42.4
27	77.5	38.8	77.5	16.8	8.3	16.8	4.61	93.0	46.5	93.9	42.0
26	77.8	38.9	77.8	16.4	8.1	16.4	4.73	92.8	46.4	93.8	41.6
25	78.1	39.0	78.1	16.1	7.9	16.1	4.86	92.7	46.4	93.8	41.2
24	78.3	39.1	78.3	15.7	7.7	15.7	4.99	92.6	46.3	93.7	40.9
23	78.5	39.3	78.5	15.4	7.6	15.4	5.11	92.4	46.2	93.6	40.4
22	78.7	39.4	78.7	15.0	7.4	15.0	5.25	92.2	46.1	93.5	40.0
21	78.9	39.5	78.9	14.7	7.2	14.7	5.38	92.1	46.0	93.4	39.6
20	79.1	39.6	79.1	14.3	7.1	14.3	5.52	91.9	45.9	93.3	39.1

-- attention: operating limits not reflected in performance table

LEGEND:

Ts-IN: Temperature renewable source - inlet [°C]
Th-OU: Temperature heating - outlet (flow) [°C]
Tc-OU: Temperature cooling - outlet (flow) [°C]
Qh nom: Heating capacity nominal
Qh min: Heating capacity minimal
Qh max: Heating capacity maximal
Pin nom: Power input at nominal heating capacity
Pin min: Power input at minimal heating capacity
Pin max: Power input at maximal heating capacity
COP nom: coefficient of performance at nominal heating capacity
Qc nom: cooling / heat extraction capacity at nominal heating capacity
Qc min: cooling / heat extraction at minimal heating capacity
Qc max: cooling / heat extraction at maximal heating capacity
I nom: Current at nominal heating capacity
EER: energy efficiency ratio at nominal cooling capacity

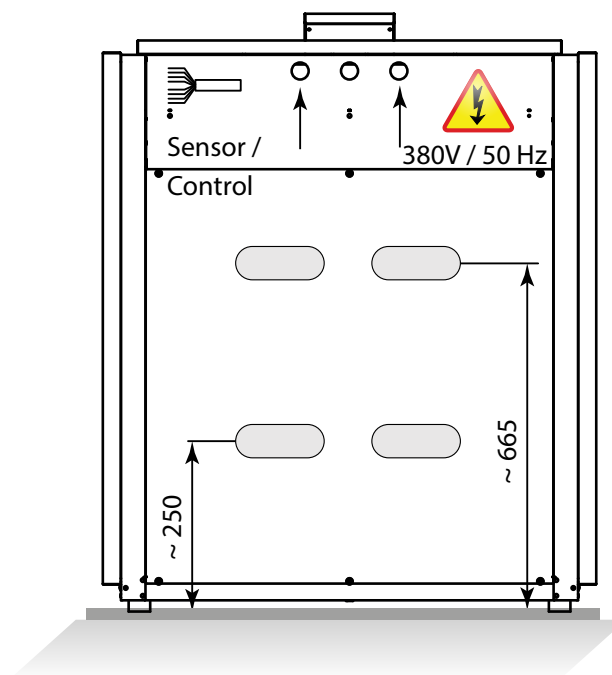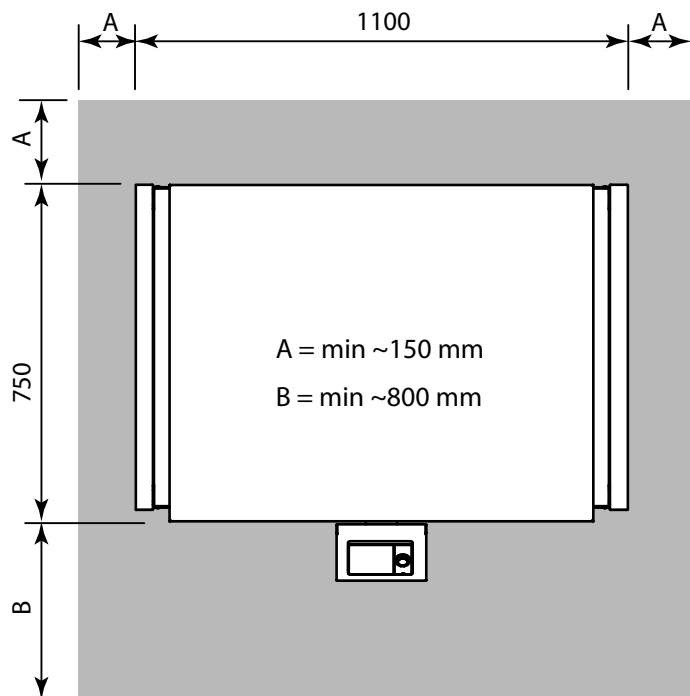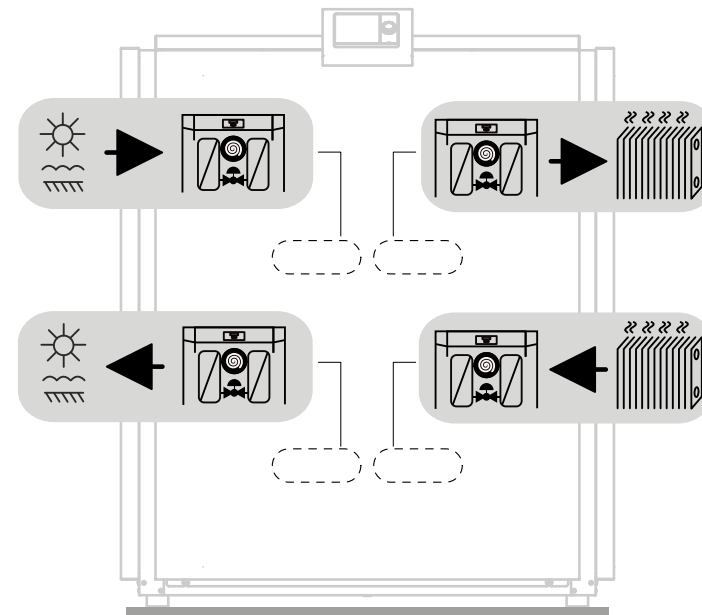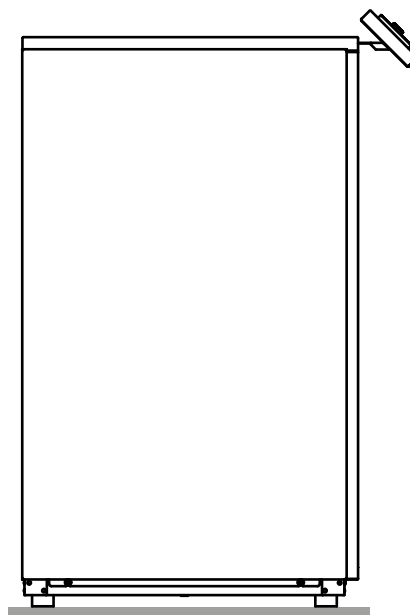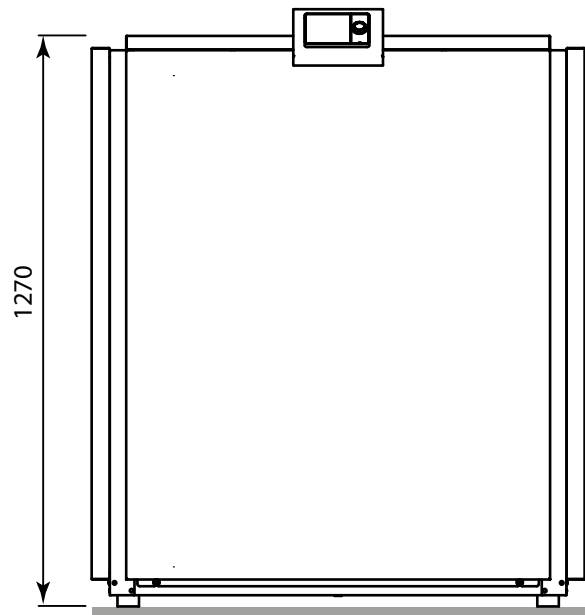

int. code: VN1100

