



WAMAK

Heat pump



AWK 27 EVI

WAMAK AWK 27 EVI

Product description

Compact heat pump for heating, cooling and domestic hot water designed for outdoor installation. A short closed refrigerant circuit with a silent Scroll compressor located in front of the low-height fan simplifies installation and aids long-term stable operation. Features include a double V-shaped heat exchanger, full stainless steel enclosure and robust frame construction.

Use for multi-family dwellings, suburban mixed-use buildings or commercial operations. The Urban range is based on a robust construction quality steel for all parts. High quality, long proven heat pump circuit components extend the life of the heat pump.

The primary source is the heat energy from the ambient air, which is blown by a silent fan in the shape of an owl's wing through a heat exchanger made of copper and aluminium.

The EVI (Enhanced Vapour Injection) technology allows the heat pump to achieve higher header flow temperatures even at lower source temperatures. EVI also has a positive impact on the compressor lifespan and overall system stability because the discharge gas temperature from the compressor is lower.

The APS (Active Process Subcooling) system simultaneously increases the stability and efficiency of operation by additional utilisation of the liquid refrigerant temperature after it has condensed.

Outdoor monoblock

Product features

- Scroll compressor
- EVI technology
- Asymetric plate heat exchanger
- Active cooling
- Enhanced defrosting with APS system
- Heated drip tray - (with accessory)
- High pressure switch
- Low pressure sensor - analogue
- Flow sensor consumer - analogue
- ECM speed circulator - condenser
- Direct heating/cooling circuit control - (with accessory)
- DHW circulation control - (with accessory)
- DHW temperature sensor - (with accessory)
- Cascade control - (with accessory)
- Body parts and frame made of fully stainless steel sheet
- Sylomer pads under compressor unit
- Electronic expansion valve
- Large air heat exchanger with APS system
- Reversible defrosting
- Speed - controlled EC fan
- Phase and rotation control
- High pressure sensor - analogue
- Flow switch consumer - on/off - (with accessory)
- Plate exchanger protection HG-BYPASS
- Mixed heating/cooling circuit control - (with accessory)
- DHW switching control - (with accessory)
- Outdoor temperature sensor - (with accessory)
- Buffer temperature sensor - (with accessory)
- Modbus connection - (with accessory)
- Solid frame structure

Basic performance data - WAMAK AWK 27 EVI

Heating - EN 14511		
Heating capacity [kW]	A7 / W35	29.0
	A2 / W35	24.7
	A-7 / W34	20.3
Electrical power input [kW]	A7 / W35	6.4
	A2 / W35	6.4
	A-7 / W34	6.3
Heating efficiency faktor [COP]	A7 / W35	4.57
	A2 / W35	3.83
	A-7 / W34	3.22
Seasonal space heating energy efficiency - SCOP EN 14825		
Average Climate / Low Temperature [35°C]	SCOP	4.37
	η [%]	174.7
	Label	A+++
	Qhe [kWh]	47518.0
	Pdesignh [kW]	23.0
	Tbivalent [°C]	-7
Cooling		
Cooling capacity - [kW]	A35 / W23-18	28.4
	A25 / W23-18	30.0
	A35 / W12-7	20.9
	A25 / W12-7	20.9
Seasonal space cooling energy efficiency - SEER EN 14825		
[W 23 / 18°C]	SEER	4.61
	Qce [kWh]	12540.0
	η_c [%]	184.3
Sound EN 12102		
Acoustic power - Lw	dB(A)	65.7
Acoustic pressure - Lp	1 m dB(A)	57.7
	5 m dB(A)	43.7
	10 m dB(A)	37.7
Mechanical and operational information		
Compressor type (3~ 400/50)	SCROLL / 1 /	On/Off
Refrigerant	R410A (GWP - 2088)	7.9 kg
Operating limit temperatures heating - (min / max) [°C]	25 / 65	
Operating limit temperatures source - (min / max) [°C]	-22 / 40	
Weight	510 kg	

Main technical data - WAMAK AWK 27 EVI

Enclosure type			AWK-VOV900		Heat energy rejection side data				
Basic dimensions	Height [mm]		1250		Operating limit temperatures heating	MAX [°C]	65		
	Width [mm]		1380			MIN [°C]	25		
	Length [mm]		1780		for more see operating limits diagram				
Weight [kg]			510		Condenser	Port size	2 "		
Colour			Inox			Type	BPHE		
Enclosure IP Class			IP44			Count	1		
Refrigeration cycle						Material	AISI 316		
Compressor	Type		Scroll		Maximal operating pressure - refrigerant [bar]			50	
	Number of stages		1		Maximal operating pressure - Water [bar]			6	
	On/Off				Testing pressure [bar]			70	
	Power factor Cosφ		0.69		Heat transfer medium			Water	
	Winding resistance		1.24 Ohm		Volume flow @ dT 5K (nom) - Water [m3/h]			5.00	
Refrigerant			R410A		Internal pressure drop - Water [kPa]			12	
	Volme		7.9 kg		ECM speed circulator - condenser			UPMXL GEO 32-125	
	GWP		2088		Flow sensor consumer - analogue			0..10V	
	Safety class		A1		Temperature difference			@ 35°C (nom) 5 K	
Refrigeration oil type	POE RL32-3MAF				@ 55°C			8 K	
	Oil volume		3.38 L		@ 65°C			10 K	
Maximal pressure - refrigerant [bar]			50		Renewable energy extraction side data				
	PED class		2		Operating limit temperatures source			MIN [°C] -22	
EVI - vapour injection with economizer						MAX [°C] 40			
APS System of liquid subcooling						for more see operating limits diagram			
Reversible operation (cooling)						Evaporator	Type	Cu-coil /Al-fin	
Reverse defrosting with hot gas							Count	1	
Plate exchanger protection HG-BYPASS							Material	Cu/Al	
Electrical connection data						Maximal operating pressure - refrigerant [bar]			29
Line voltage [#~ V/Hz]			3~ 400/50		Heat transfer medium			Air	
Current	nominal [A]		12.30		Volume flow - Air [m3/h]			9060	
	maximal [A]		21.00		Internal pressure drop - Air [kPa]			0.023	
	starting [A]		32.12		Temperature difference - Air			7 K	
Softstart			-		Number of fans			1	
Main safety			C32		Fan diameter [mm]			800	
Control System									
Main controller	SIEMENS	RVS 21 AVS 55.199							
Extension module	AVS75.3xx	AVS75.3xx	AVS75.372						
Bus Clip-In		LPB OCI346	Modbus OCI352						
Online connection		Web server OZW672	ToSyMo						
Superheat controller			1 - EEV H/C						
*** with accessory									

WAMAK AWK 27 EVI

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	AWK 27 EVI
Air-to-water heat pump	yes
Brine-to-water heat pump	no
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	low (35 °C - 30 °C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	23.0	kW	Seasonal space heating energy efficiency	ηs	174.7	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	20.3	kW	Tj = -7 °C	COPd	3.22	-
Tj = +2 °C	Pdh	24.6	kW	Tj = +2 °C	COPd	4.3	-
Tj = +7 °C	Pdh	29.0	kW	Tj = +7 °C	COPd	5.6	-
Tj = +12 °C	Pdh	33.7	kW	Tj = +12 °C	COPd	7.5	-
Tj = bivalent temperature	Pdh	19.7	kW	Tj = bivalent temperature	COPd	3.1	-
Tj = operation limit temperature	Pdh	13.9	kW	Tj = operation limit temperature	COPd	2.2	-
Bivalent temperature	Tbiv	-7	°C	Tj = operation limit temperature	TOL	-22	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.040	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	10.5	kW
Standby mode	Psb	0.010	kW	Type of energy input		electricity	
Crankcase heater mode	Pck	0.050	kW				
Other items							
Capacity control		fixed		For air-to-water heat pumps: Rated air flow rate, outdoors	-	9060	m3/h
Sound power level				For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	---	m3/h
indoors	Lwa	---	dB				
outdoors	Lwa	66	dB				
Annual energy consumption	QHE	47518.0	kWh				

Contact details: WAMAK, s.r.o., Orovnica 252, 96652, Orovnica, Slovakia, info@wamak.sk

WAMAK AWK 27 EVI

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	AWK 27 EVI
Air-to-water heat pump	yes
Brine-to-water heat pump	no
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	middle (55 °C - 47 °C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	24.0	kW	Seasonal space heating energy efficiency	ηs	133.7	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	21.0	kW	Tj = -7 °C	COPd	2.16	-
Tj = +2 °C	Pdh	24.8	kW	Tj = +2 °C	COPd	3.3	-
Tj = +7 °C	Pdh	29.1	kW	Tj = +7 °C	COPd	4.5	-
Tj = +12 °C	Pdh	33.9	kW	Tj = +12 °C	COPd	6.3	-
Tj = bivalent temperature	Pdh	20.6	kW	Tj = bivalent temperature	COPd	2.0	-
Tj = operation limit temperature	Pdh	15.4	kW	Tj = operation limit temperature	COPd	1.5	-
Bivalent temperature	Tbiv	-7	°C	Tj = operation limit temperature	TOL	-22	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.040	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	10.5	kW
Standby mode	Psb	0.010	kW	Type of energy input		electricity	
Crankcase heater mode	Pck	0.050	kW				
Other items							
Capacity control		fixed		For air-to-water heat pumps: Rated air flow rate, outdoors	-	9060	m3/h
Sound power level				For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	---	m3/h
indoors	Lwa	---	dB				
outdoors	Lwa	66	dB				
Annual energy consumption	QHE	49584.0	kWh				

Contact details: WAMAK, s.r.o., Orovnica 252, 96652, Orovnica, Slovakia, info@wamak.sk



ENERG

енергия - ενεργεια



WAMAK

AWK 27 EVI



55 °C

35 °C

A+++

A++

A+

A

B

C

D

A++

A+++



--- dB



66 dB

■ 26
■ 24
■ 24
kW

■ 24
■ 23
■ 22
kW



2019

811/2013

AWK 27 EVI

ErP Data

	55 °C	35 °C
Energy class	A++	A+++
η [%]	133.7	174.7
P_{rated} [kW]	24	23
Q_{HE} [kWh/y]	49584	47518
SCOP [-]	3.34	4.37
$T_{bivalent}$ [°C]	-7	-7

CONTROLLER



+ QAA55/75

class VII

3.5% ↓

- QAA55/75

class III

1.5% ↓

Heating performance data

Version: v2024.004-AW

Average Climate / Low Temperature [35°C]

ZHI27K1P-TFD_R410A_1_AW

Operating conditions		Qh	P	COP
1	A7 / W30-35	29.0	6.4	4.57
2	A2 / W35	24.7	6.4	3.83
3	A-22 / W35	13.9	6.4	2.19
A	A-7 / W34	20.3	6.3	3.22
B	A2 / W30	24.6	5.7	4.29
C	A7 / W27	29.0	5.2	5.55
D	A12 / W24	33.7	4.5	7.48
E	A-10 / W35	19.7	6.4	3.06
F	A-7 / W34	20.3	6.3	3.22

SCOP DATA EN 14825:2018	
Average Climate / Low Temperature [35°C]	
SCOPon	4.51
SCOPnet	4.55
SCOP	4.37
η [%]	174.74
Label	A+++
Qh [kWh]	47518.00
Pdesignh [kW]	23.0
Tbivalent [°C]	-7.00

Average Climate / Medium Temperature [55°C]

Operating conditions		Qh	P	COP
1	A7 / W47-55	29.3	10.5	2.80
2	A2 / W55	25.2	10.5	2.41
3	A-22 / W55	15.4	9.8	1.46
A	A-7 / W52	21.0	9.7	2.16
B	A2 / W42	24.8	7.6	3.27
C	A7 / W36	29.1	6.5	4.46
D	A12 / W30	33.9	5.4	6.29
E	A-10 / W55	20.6	10.5	1.97
F	A-7 / W55	21.2	10.5	2.02

SCOP DATA EN 14825:2018	
Average Climate / Medium Temperature [55°C]	
SCOPon	3.42
SCOPnet	3.45
SCOP	3.34
η [%]	133.68
Label	A++
Qh [kWh]	49584.00
Pdesignh [kW]	24.0
Tbivalent [°C]	-7.00

Cooling performance data

Low temperature cooling W 12 / 7°C

Operating conditions		Qc	P	EER
A	A35 / W12-7	20.9	7.7	2.70
B	A30 / W12-7	21.7	6.9	3.16
C	A25 / W12-7	22.3	6.1	3.67
D	A20 / W12-7	22.9	5.4	4.24


SEER DATA EN 14825:2018 [W 12 / 7°C]	
SEERon	3.56
SEER	3.46
Qc [kWh]	12540.00
η [%]	138.31

Radiant cooling W 23 / 18°C


Operating conditions		Qc	P	EER
A	A35 / W23-18	28.4	7.7	3.67
B	A30 / W23-18	29.3	6.1	4.26
C	A25 / W23-18	30.0	5.4	4.93
D	A20 / W23-18	30.7	4.6	5.68

SEER DATA EN 14825:2018 [W 23 / 18°C]	
SEERon	4.80
SEER	4.61
Qc [kWh]	12540.00
η [%]	184.29

Performance lines - heating

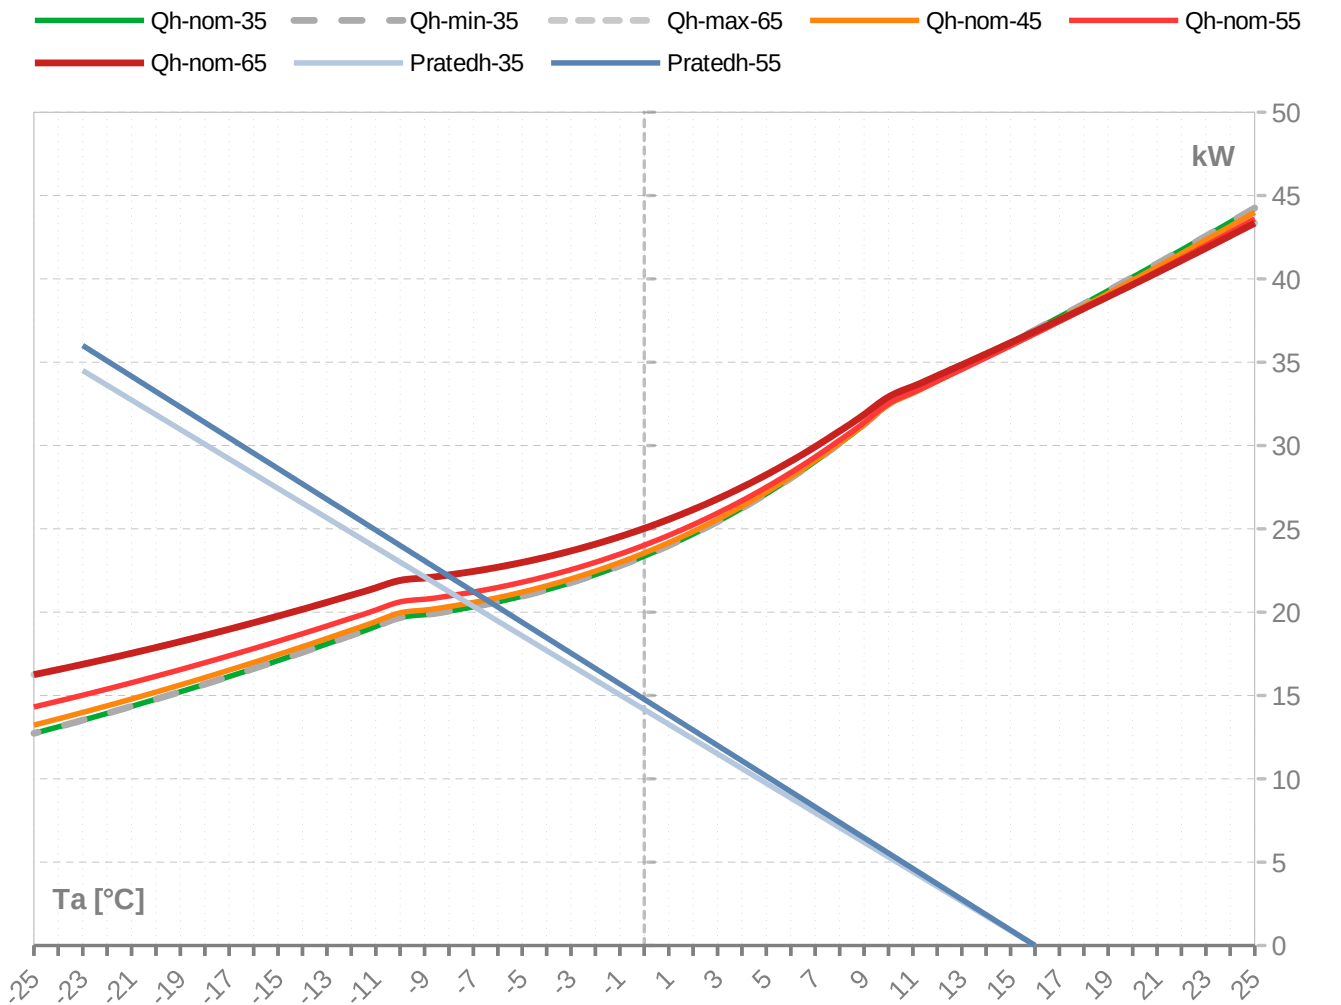

Performance lines - cooling

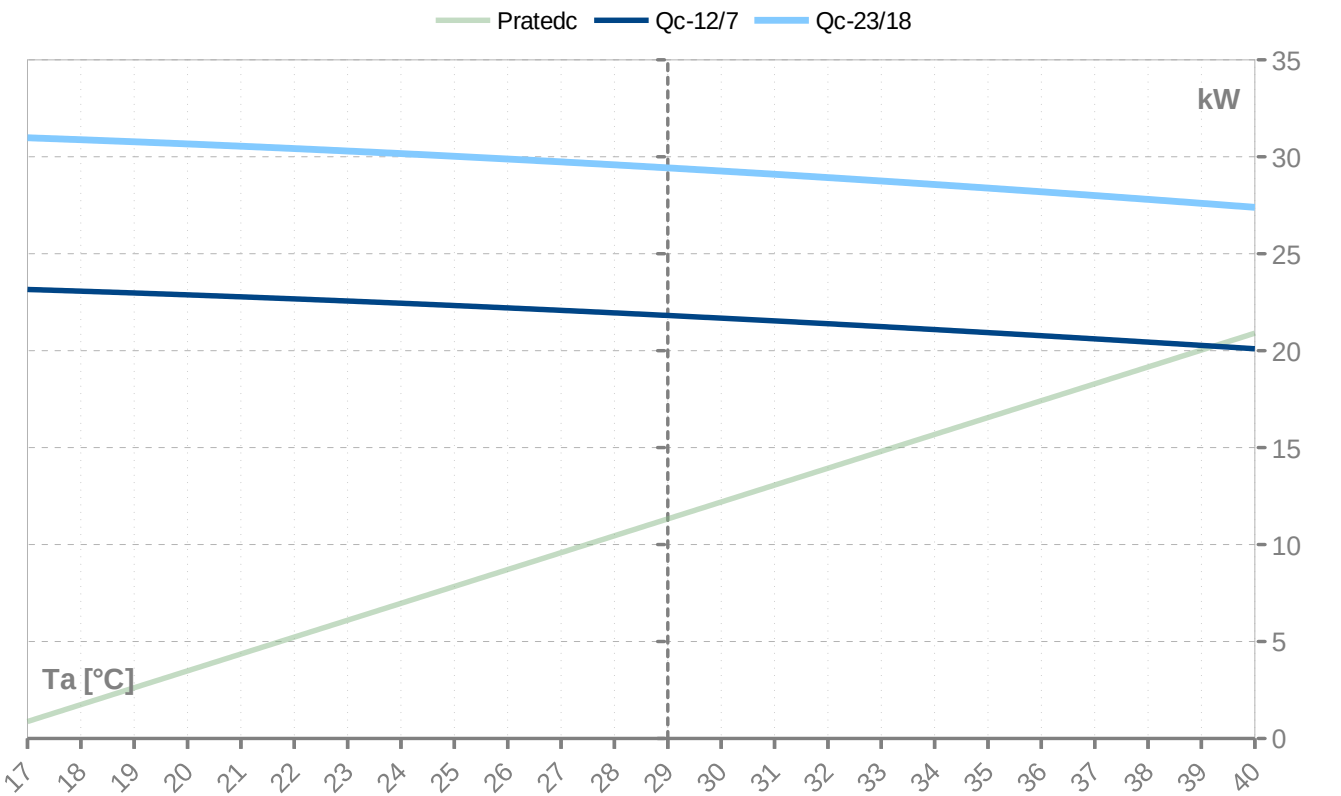

Th [°C]		35 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
24	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
23	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
22	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
21	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
20	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
19	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
18	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
17	37.7	37.7		6.0	6.0		6.34	11.9	11.9	
16	36.9	36.9	36.9	6.0	6.0	6.0	6.15	12.0	12.0	12.0
15	36.2	36.2	36.2	6.0	6.0	6.0	5.98	12.0	12.0	12.0
14	35.4	35.4	35.4	6.1	6.1	6.1	5.81	12.0	12.0	12.0
13	34.7	34.7	34.7	6.1	6.1	6.1	5.65	12.1	12.1	12.1
12	33.9	33.9	33.9	6.2	6.2	6.2	5.50	12.1	12.1	12.1
11	33.2	33.2	33.2	6.2	6.2	6.2	5.35	12.1	12.1	12.1
10	32.5	32.5	32.5	6.2	6.2	6.2	5.21	12.2	12.2	12.2
9	31.3	31.3	31.3	6.3	6.3	6.3	4.97	12.2	12.2	12.2
8	30.1	30.1	30.1	6.3	6.3	6.3	4.76	12.3	12.3	12.3
7	29.0	29.0	29.0	6.4	6.4	6.4	4.57	12.3	12.3	12.3
6	28.0	28.0	28.0	6.4	6.4	6.4	4.39	12.3	12.3	12.3
5	27.1	27.1	27.1	6.4	6.4	6.4	4.23	12.4	12.4	12.4
4	26.2	26.2	26.2	6.4	6.4	6.4	4.09	12.4	12.4	12.4
3	25.4	25.4	25.4	6.4	6.4	6.4	3.96	12.4	12.4	12.4
2	24.7	24.7	24.7	6.4	6.4	6.4	3.83	12.4	12.4	12.4
1	24.0	24.0	24.0	6.4	6.4	6.4	3.72	12.4	12.4	12.4
0	23.4	23.4	23.4	6.4	6.4	6.4	3.62	12.4	12.4	12.4
-1	22.8	22.8	22.8	6.4	6.4	6.4	3.53	12.5	12.5	12.5
-2	22.2	22.2	22.2	6.4	6.4	6.4	3.45	12.5	12.5	12.5
-3	21.8	21.8	21.8	6.4	6.4	6.4	3.38	12.5	12.5	12.5
-4	21.3	21.3	21.3	6.4	6.4	6.4	3.31	12.5	12.5	12.5
-5	21.0	21.0	21.0	6.4	6.4	6.4	3.25	12.5	12.5	12.5
-6	20.6	20.6	20.6	6.4	6.4	6.4	3.20	12.5	12.5	12.5
-7	20.3	20.3	20.3	6.4	6.4	6.4	3.15	12.5	12.5	12.5
-8	20.1	20.1	20.1	6.4	6.4	6.4	3.11	12.5	12.5	12.5
-9	19.8	19.8	19.8	6.4	6.4	6.4	3.08	12.5	12.5	12.5
-10	19.7	19.7	19.7	6.4	6.4	6.4	3.06	12.5	12.5	12.5
-11	19.1	19.1	19.1	6.4	6.4	6.4	2.97	12.5	12.5	12.5
-12	18.6	18.6	18.6	6.4	6.4	6.4	2.90	12.5	12.5	12.5
-13	18.1	18.1	18.1	6.4	6.4	6.4	2.82	12.5	12.5	12.5
-14	17.6	17.6	17.6	6.4	6.4	6.4	2.74	12.4	12.4	12.4
-15	17.1	17.1	17.1	6.4	6.4	6.4	2.67	12.4	12.4	12.4
-16	16.6	16.6	16.6	6.4	6.4	6.4	2.60	12.4	12.4	12.4
-17	16.1	16.1	16.1	6.4	6.4	6.4	2.52	12.4	12.4	12.4
-18	15.7	15.7	15.7	6.4	6.4	6.4	2.45	12.4	12.4	12.4
-19	15.2	15.2	15.2	6.4	6.4	6.4	2.39	12.4	12.4	12.4
-20	14.8	14.8	14.8	6.4	6.4	6.4	2.32	12.4	12.4	12.4
-21	14.3	14.3	14.3	6.4	6.4	6.4	2.25	12.4	12.4	12.4
-22	13.9	13.9	13.9	6.4	6.4	6.4	2.19	12.3	12.3	12.3
-23	13.5	13.5	13.5	6.4	6.4	6.4	2.13	12.3	12.3	12.3
-24	13.1	13.1	13.1	6.3	6.3	6.3	2.07	12.3	12.3	12.3
-25	12.7	12.7	12.7	6.3	6.3	6.3	2.01	12.3	12.3	12.3

* attention: operating limits not reflected in performance table

ZHI27K1P-TFD_R410A_1_AW

Th [°C]		45 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	44.0	44.0	44.0	7.5	7.5	7.5	5.88	13.5	13.5	13.5
24	43.2	43.2	43.2	7.5	7.5	7.5	5.73	13.5	13.5	13.5
23	42.3	42.3	42.3	7.6	7.6	7.6	5.58	13.6	13.6	13.6
22	41.5	41.5	41.5	7.6	7.6	7.6	5.43	13.6	13.6	13.6
21	40.7	40.7	40.7	7.7	7.7	7.7	5.29	13.7	13.7	13.7
20	39.9	39.9	39.9	7.7	7.7	7.7	5.16	13.7	13.7	13.7
19	39.1	39.1	39.1	7.8	7.8	7.8	5.03	13.8	13.8	13.8
18	38.4	38.4	38.4	7.8	7.8	7.8	4.90	13.8	13.8	13.8
17	37.6	37.6	37.6	7.9	7.9	7.9	4.78	13.9	13.9	13.9
16	36.8	36.8	36.8	7.9	7.9	7.9	4.66	13.9	13.9	13.9
15	36.1	36.1	36.1	7.9	7.9	7.9	4.55	14.0	14.0	14.0
14	35.3	35.3	35.3	8.0	8.0	8.0	4.44	14.0	14.0	14.0
13	34.6	34.6	34.6	8.0	8.0	8.0	4.33	14.0	14.0	14.0
12	33.9	33.9	33.9	8.0	8.0	8.0	4.23	14.1	14.1	14.1
11	33.1	33.1	33.1	8.0	8.0	8.0	4.13	14.1	14.1	14.1
10	32.4	32.4	32.4	8.0	8.0	8.0	4.03	14.1	14.1	14.1
9	31.3	31.3	31.3	8.1	8.1	8.1	3.87	14.2	14.2	14.2
8	30.2	30.2	30.2	8.1	8.1	8.1	3.72	14.2	14.2	14.2
7	29.1	29.1	29.1	8.1	8.1	8.1	3.59	14.2	14.2	14.2
6	28.1	28.1	28.1	8.1	8.1	8.1	3.46	14.3	14.3	14.3
5	27.2	27.2	27.2	8.1	8.1	8.1	3.34	14.3	14.3	14.3
4	26.4	26.4	26.4	8.1	8.1	8.1	3.24	14.3	14.3	14.3
3	25.6	25.6	25.6	8.1	8.1	8.1	3.14	14.3	14.3	14.3
2	24.8	24.8	24.8	8.1	8.1	8.1	3.05	14.3	14.3	14.3
1	24.2	24.2	24.2	8.1	8.1	8.1	2.97	14.3	14.3	14.3
0	23.5	23.5	23.5	8.1	8.1	8.1	2.89	14.3	14.3	14.3
-1	23.0	23.0	23.0	8.1	8.1	8.1	2.82	14.3	14.3	14.3
-2	22.5	22.5	22.5	8.1	8.1	8.1	2.76	14.3	14.3	14.3
-3	22.0	22.0	22.0	8.1	8.1	8.1	2.70	14.3	14.3	14.3
-4	21.6	21.6	21.6	8.1	8.1	8.1	2.65	14.3	14.3	14.3
-5	21.2	21.2	21.2	8.1	8.1	8.1	2.61	14.3	14.3	14.3
-6	20.9	20.9	20.9	8.1	8.1	8.1	2.57	14.3	14.3	14.3
-7	20.6	20.6	20.6	8.1	8.1	8.1	2.53	14.3	14.3	14.3
-8	20.3	20.3	20.3	8.1	8.1	8.1	2.50	14.3	14.3	14.3
-9	20.1	20.1	20.1	8.1	8.1	8.1	2.48	14.3	14.3	14.3
-10	20.0	20.0	20.0	8.1	8.1	8.1	2.46	14.3	14.3	14.3
-11	19.4	19.4	19.4	8.1	8.1	8.1	2.39	14.3	14.3	14.3
-12	18.9	18.9	18.9	8.1	8.1	8.1	2.33	14.3	14.3	14.3
-13	18.4	18.4	18.4	8.1	8.1	8.1	2.27	14.2	14.2	14.2
-14	17.9	17.9	17.9	8.1	8.1	8.1	2.21	14.2	14.2	14.2
-15	17.4	17.4	17.4	8.1	8.1	8.1	2.15	14.2	14.2	14.2
-16	17.0	17.0	17.0	8.1	8.1	8.1	2.10	14.2	14.2	14.2
-17	16.5	16.5	16.5	8.1	8.1	8.1	2.04	14.2	14.2	14.2
-18	16.1	16.1	16.1	8.1	8.1	8.1	1.99	14.1	14.1	14.1
-19	15.6	15.6	15.6	8.1	8.1	8.1	1.93	14.1	14.1	14.1
-20	15.2	15.2	15.2	8.1	8.1	8.1	1.88	14.1	14.1	14.1
-21	14.8	14.8	14.8	8.1	8.1	8.1	1.83	14.1	14.1	14.1
-22	14.4	14.4	14.4	8.1	8.1	8.1	1.78	14.0	14.0	14.0
-23	14.0	14.0	14.0	8.1	8.1	8.1	1.73	14.0	14.0	14.0
-24	13.6	13.6	13.6	8.1	8.1	8.1	1.68	14.0	14.0	14.0
-25	13.2	13.2	13.2	8.1	8.1	8.1	1.63	13.9	13.9	13.9

* attention: operating limits not reflected in performance table

Th [°C]		55 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	43.6	43.6	43.6	10.0	10.0	10.0	4.36	16.3	16.3	16.3
24	42.8	42.8	42.8	10.0	10.0	10.0	4.26	16.4	16.4	16.4
23	42.0	42.0	42.0	10.1	10.1	10.1	4.16	16.4	16.4	16.4
22	41.2	41.2	41.2	10.1	10.1	10.1	4.07	16.5	16.5	16.5
21	40.4	40.4	40.4	10.2	10.2	10.2	3.98	16.5	16.5	16.5
20	39.7	39.7	39.7	10.2	10.2	10.2	3.89	16.6	16.6	16.6
19	38.9	38.9	38.9	10.2	10.2	10.2	3.81	16.6	16.6	16.6
18	38.2	38.2	38.2	10.3	10.3	10.3	3.72	16.7	16.7	16.7
17	37.4	37.4	37.4	10.3	10.3	10.3	3.64	16.7	16.7	16.7
16	36.7	36.7	36.7	10.3	10.3	10.3	3.56	16.8	16.8	16.8
15	36.0	36.0	36.0	10.3	10.3	10.3	3.48	16.8	16.8	16.8
14	35.3	35.3	35.3	10.3	10.3	10.3	3.41	16.8	16.8	16.8
13	34.6	34.6	34.6	10.4	10.4	10.4	3.33	16.9	16.9	16.9
12	33.9	33.9	33.9	10.4	10.4	10.4	3.26	16.9	16.9	16.9
11	33.2	33.2	33.2	10.4	10.4	10.4	3.19	16.9	16.9	16.9
10	32.5	32.5	32.5	10.4	10.4	10.4	3.12	16.9	16.9	16.9
9	31.4	31.4	31.4	10.4	10.4	10.4	3.01	17.0	17.0	17.0
8	30.3	30.3	30.3	10.4	10.4	10.4	2.90	17.0	17.0	17.0
7	29.3	29.3	29.3	10.5	10.5	10.5	2.80	17.0	17.0	17.0
6	28.4	28.4	28.4	10.5	10.5	10.5	2.71	17.0	17.0	17.0
5	27.5	27.5	27.5	10.5	10.5	10.5	2.63	17.0	17.0	17.0
4	26.7	26.7	26.7	10.5	10.5	10.5	2.55	17.0	17.0	17.0
3	25.9	25.9	25.9	10.5	10.5	10.5	2.48	17.0	17.0	17.0
2	25.2	25.2	25.2	10.5	10.5	10.5	2.41	17.0	17.0	17.0
1	24.6	24.6	24.6	10.5	10.5	10.5	2.35	17.0	17.0	17.0
0	24.0	24.0	24.0	10.5	10.5	10.5	2.29	17.0	17.0	17.0
-1	23.5	23.5	23.5	10.5	10.5	10.5	2.24	17.0	17.0	17.0
-2	23.0	23.0	23.0	10.5	10.5	10.5	2.20	17.0	17.0	17.0
-3	22.5	22.5	22.5	10.5	10.5	10.5	2.15	17.0	17.0	17.0
-4	22.1	22.1	22.1	10.5	10.5	10.5	2.12	17.0	17.0	17.0
-5	21.8	21.8	21.8	10.5	10.5	10.5	2.08	17.0	17.0	17.0
-6	21.5	21.5	21.5	10.5	10.5	10.5	2.05	17.0	17.0	17.0
-7	21.2	21.2	21.2	10.5	10.5	10.5	2.02	17.0	17.0	17.0
-8	21.0	21.0	21.0	10.5	10.5	10.5	2.00	16.9	16.9	16.9
-9	20.8	20.8	20.8	10.5	10.5	10.5	1.98	16.9	16.9	16.9
-10	20.6	20.6	20.6	10.5	10.5	10.5	1.97	16.9	16.9	16.9
-11	20.1	20.1	20.1	10.5	10.5	10.5	1.92	16.9	16.9	16.9
-12	19.6	19.6	19.6	10.5	10.5	10.5	1.87	16.9	16.9	16.9
-13	19.2	19.2	19.2	10.5	10.5	10.5	1.83	16.9	16.9	16.9
-14	18.7	18.7	18.7	10.5	10.5	10.5	1.78	16.8	16.8	16.8
-15	18.3	18.3	18.3	10.5	10.5	10.5	1.74	16.8	16.8	16.8
-16	17.8	17.8	17.8	10.5	10.5	10.5	1.70	16.8	16.8	16.8
-17	17.4	17.4	17.4	10.5	10.5	10.5	1.66	16.7	16.7	16.7
-18	17.0	17.0	17.0	10.5	10.5	10.5	1.62	16.7	16.7	16.7
-19	16.6	16.6	16.6	10.5	10.5	10.5	1.57	16.6	16.6	16.6
-20	16.2	16.2	16.2	10.5	10.5	10.5	1.54	16.6	16.6	16.6
-21	15.8	15.8	15.8	10.5	10.5	10.5	1.50	16.5	16.5	16.5
-22	15.4	15.4	15.4	10.5	10.5	10.5	1.46	16.5	16.5	16.5
-23	15.0	15.0	15.0	10.6	10.6	10.6	1.42	16.5	16.5	16.5
-24	14.7	14.7	14.7	10.6	10.6	10.6	1.39	16.4	16.4	16.4
-25	14.3	14.3	14.3	10.6	10.6	10.6	1.35	16.3	16.3	16.3

* attention: operating limits not reflected in performance table

Th [°C]		T-Max @ 65 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	43.3	43.3	43.3	13.2	13.2	13.2	3.28	20.2	20.2	20.2
24	42.6	42.6	42.6	13.3	13.3	13.3	3.21	20.3	20.3	20.3
23	41.8	41.8	41.8	13.3	13.3	13.3	3.15	20.4	20.4	20.4
22	41.1	41.1	41.1	13.3	13.3	13.3	3.08	20.4	20.4	20.4
21	40.4	40.4	40.4	13.4	13.4	13.4	3.02	20.4	20.4	20.4
20	39.6	39.6	39.6	13.4	13.4	13.4	2.96	20.5	20.5	20.5
19	38.9	38.9	38.9	13.4	13.4	13.4	2.90	20.5	20.5	20.5
18	38.2	38.2	38.2	13.4	13.4	13.4	2.85	20.6	20.6	20.6
17	37.5	37.5	37.5	13.4	13.4	13.4	2.79	20.6	20.6	20.6
16	36.8	36.8	36.8	13.5	13.5	13.5	2.74	20.6	20.6	20.6
15	36.2	36.2	36.2	13.5	13.5	13.5	2.68	20.7	20.7	20.7
14	35.5	35.5	35.5	13.5	13.5	13.5	2.63	20.7	20.7	20.7
13	34.8	34.8	34.8	13.5	13.5	13.5	2.58	20.7	20.7	20.7
12	34.2	34.2	34.2	13.5	13.5	13.5	2.53	20.7	20.7	20.7
11	33.5	33.5	33.5	13.5	13.5	13.5	2.48	20.8	20.8	20.8
10	32.9	32.9	32.9	13.5	13.5	13.5	2.43	20.8	20.8	20.8
9	31.9	31.9	31.9	13.6	13.6	13.6	2.35	20.8	20.8	20.8
8	30.9	30.9	30.9	13.6	13.6	13.6	2.27	20.8	20.8	20.8
7	29.9	29.9	29.9	13.6	13.6	13.6	2.20	20.8	20.8	20.8
6	29.1	29.1	29.1	13.6	13.6	13.6	2.14	20.8	20.8	20.8
5	28.2	28.2	28.2	13.6	13.6	13.6	2.08	20.8	20.8	20.8
4	27.5	27.5	27.5	13.6	13.6	13.6	2.02	20.8	20.8	20.8
3	26.8	26.8	26.8	13.6	13.6	13.6	1.97	20.8	20.8	20.8
2	26.2	26.2	26.2	13.6	13.6	13.6	1.92	20.8	20.8	20.8
1	25.6	25.6	25.6	13.6	13.6	13.6	1.87	20.8	20.8	20.8
0	25.0	25.0	25.0	13.6	13.6	13.6	1.83	20.7	20.7	20.7
-1	24.5	24.5	24.5	13.7	13.7	13.7	1.80	20.7	20.7	20.7
-2	24.1	24.1	24.1	13.7	13.7	13.7	1.76	20.7	20.7	20.7
-3	23.7	23.7	23.7	13.7	13.7	13.7	1.73	20.7	20.7	20.7
-4	23.3	23.3	23.3	13.7	13.7	13.7	1.70	20.7	20.7	20.7
-5	23.0	23.0	23.0	13.7	13.7	13.7	1.68	20.6	20.6	20.6
-6	22.7	22.7	22.7	13.7	13.7	13.7	1.66	20.6	20.6	20.6
-7	22.4	22.4	22.4	13.7	13.7	13.7	1.64	20.6	20.6	20.6
-8	22.2	22.2	22.2	13.7	13.7	13.7	1.62	20.6	20.6	20.6
-9	22.0	22.0	22.0	13.7	13.7	13.7	1.61	20.6	20.6	20.6
-10	21.9	21.9	21.9	13.7	13.7	13.7	1.60	20.6	20.6	20.6
-11	21.5	21.5	21.5	13.7	13.7	13.7	1.56	20.5	20.5	20.5
-12	21.0	21.0	21.0	13.7	13.7	13.7	1.53	20.5	20.5	20.5
-13	20.6	20.6	20.6	13.7	13.7	13.7	1.50	20.4	20.4	20.4
-14	20.2	20.2	20.2	13.8	13.8	13.8	1.47	20.4	20.4	20.4
-15	19.8	19.8	19.8	13.8	13.8	13.8	1.43	20.4	20.4	20.4
-16										
-17										
-18										
-19										
-20										
-21										
-22										
-23										
-24										
-25										

* attention: operating limits not reflected in performance table

WAMAK AWK 27 EVI

Tc [°C]		W 12 / 7 °C								
Ta [°C]	Qc nom [kW]	Qc min [kW]	Qc max [kW]	Pin [kW]	Pin min [kW]	Pin max [kW]	EER kW / kW	I nom [A]	I min [A]	I max [A]
40	20.1	20.1	20.1	8.8	8.8	8.8	2.29	15.0	15.0	15.0
39	20.3	20.3	20.3	8.5	8.5	8.5	2.37	14.7	14.7	14.7
38	20.4	20.4	20.4	8.3	8.3	8.3	2.45	14.5	14.5	14.5
37	20.6	20.6	20.6	8.1	8.1	8.1	2.53	14.3	14.3	14.3
36	20.8	20.8	20.8	7.9	7.9	7.9	2.62	14.0	14.0	14.0
35	20.9	20.9	20.9	7.7	7.7	7.7	2.70	13.8	13.8	13.8
34	21.1	21.1	21.1	7.6	7.6	7.6	2.79	13.6	13.6	13.6
33	21.2	21.2	21.2	7.4	7.4	7.4	2.88	13.4	13.4	13.4
32	21.4	21.4	21.4	7.2	7.2	7.2	2.97	13.2	13.2	13.2
31	21.5	21.5	21.5	7.0	7.0	7.0	3.06	13.0	13.0	13.0
30	21.7	21.7	21.7	6.9	6.9	6.9	3.16	12.8	12.8	12.8
29	21.8	21.8	21.8	6.7	6.7	6.7	3.26	12.7	12.7	12.7
28	21.9	21.9	21.9	6.5	6.5	6.5	3.35	12.5	12.5	12.5
27	22.1	22.1	22.1	6.4	6.4	6.4	3.46	12.4	12.4	12.4
26	22.2	22.2	22.2	6.2	6.2	6.2	3.56	12.2	12.2	12.2
25	22.3	22.3	22.3	6.1	6.1	6.1	3.67	12.1	12.1	12.1
24	22.4	22.4	22.4	5.9	5.9	5.9	3.77	11.9	11.9	11.9
23	22.6	22.6	22.6	5.8	5.8	5.8	3.89	11.8	11.8	11.8
22	22.7	22.7	22.7	5.7	5.7	5.7	4.00	11.7	11.7	11.7
21	22.8	22.8	22.8	5.5	5.5	5.5	4.12	11.5	11.5	11.5
20	22.9	22.9	22.9	5.4	5.4	5.4	4.24	11.4	11.4	11.4
19	23.0	23.0	23.0	5.3	5.3	5.3	4.36	11.3	11.3	11.3
18	23.1	23.1	23.1	5.1	5.1	5.1	4.49	11.2	11.2	11.2
17	23.2	23.2	23.2	5.0	5.0	5.0	4.62	11.1	11.1	11.1

Tc [°C]		W 23 / 18 °C								
Ta [°C]	Qc [kW]	Qh-min [kW]	Qh-max [kW]	Pin [kW]	Pin-min [kW]	Pin-max [kW]	EER kW / kW	I [A]	I-min [A]	I-max [A]
40	27.4	27.4	27.4	8.8	8.8	8.8	3.13	14.8	14.8	14.8
39	27.6	27.6	27.6	8.5	8.5	8.5	3.23	14.5	14.5	14.5
38	27.8	27.8	27.8	8.3	8.3	8.3	3.34	14.2	14.2	14.2
37	28.0	28.0	28.0	8.1	8.1	8.1	3.44	14.0	14.0	14.0
36	28.2	28.2	28.2	7.9	7.9	7.9	3.55	13.8	13.8	13.8
35	28.4	28.4	28.4	7.7	7.7	7.7	3.67	13.6	13.6	13.6
34	28.6	28.6	28.6	7.6	7.6	7.6	3.78	13.3	13.3	13.3
33	28.7	28.7	28.7	7.4	7.4	7.4	3.90	13.1	13.1	13.1
32	28.9	28.9	28.9	7.2	7.2	7.2	4.02	12.9	12.9	12.9
31	29.1	29.1	29.1	7.0	7.0	7.0	4.14	12.7	12.7	12.7
30	29.3	29.3	29.3	6.9	6.9	6.9	4.26	12.6	12.6	12.6
29	29.4	29.4	29.4	6.7	6.7	6.7	4.39	12.4	12.4	12.4
28	29.6	29.6	29.6	6.5	6.5	6.5	4.52	12.2	12.2	12.2
27	29.7	29.7	29.7	6.4	6.4	6.4	4.65	12.1	12.1	12.1
26	29.9	29.9	29.9	6.2	6.2	6.2	4.79	11.9	11.9	11.9
25	30.0	30.0	30.0	6.1	6.1	6.1	4.93	11.7	11.7	11.7
24	30.2	30.2	30.2	5.9	5.9	5.9	5.07	11.6	11.6	11.6
23	30.3	30.3	30.3	5.8	5.8	5.8	5.22	11.5	11.5	11.5
22	30.4	30.4	30.4	5.7	5.7	5.7	5.37	11.3	11.3	11.3
21	30.5	30.5	30.5	5.5	5.5	5.5	5.52	11.2	11.2	11.2
20	30.7	30.7	30.7	5.4	5.4	5.4	5.68	11.1	11.1	11.1
19	30.8	30.8	30.8	5.3	5.3	5.3	5.84	11.0	11.0	11.0
18	30.9	30.9	30.9	5.1	5.1	5.1	6.01	10.9	10.9	10.9
17	31.0	31.0	31.0	5.0	5.0	5.0	6.18	10.8	10.8	10.8

* attention: operating limits not reflected in performance table

LEGENDE:

Ts-IN: Temperature renewable source - inlet [°C]

Th-OU: Temperature heating - outlet (flow) [°C]

Tc-OU: Temperature cooling - outlet (flow) [°C]

Qh nom: Heating capacity nominal

Qh min: Heating capacity minimal

Qh max: Heating capacity maximal

Pin nom: Power input at nominal heating capacity

Pin min: Power input at minimal heating capacity

Pin max: Power input at maximal heating capacity

COP nom: coefficient of performance at nominal heating capacity





Qc nom: cooling / heat extraction capacity at nominal heating capacity

Qc min: cooling / heat extraction at minimal heating capacity

Qc max: cooling / heat extraction at maximal heating capacity

I nom: Current at nominal heating capacity

EER: energy efficiency ratio at nominal cooling capacity

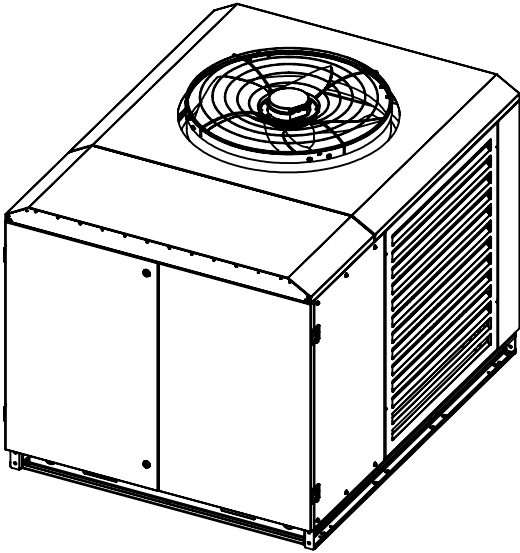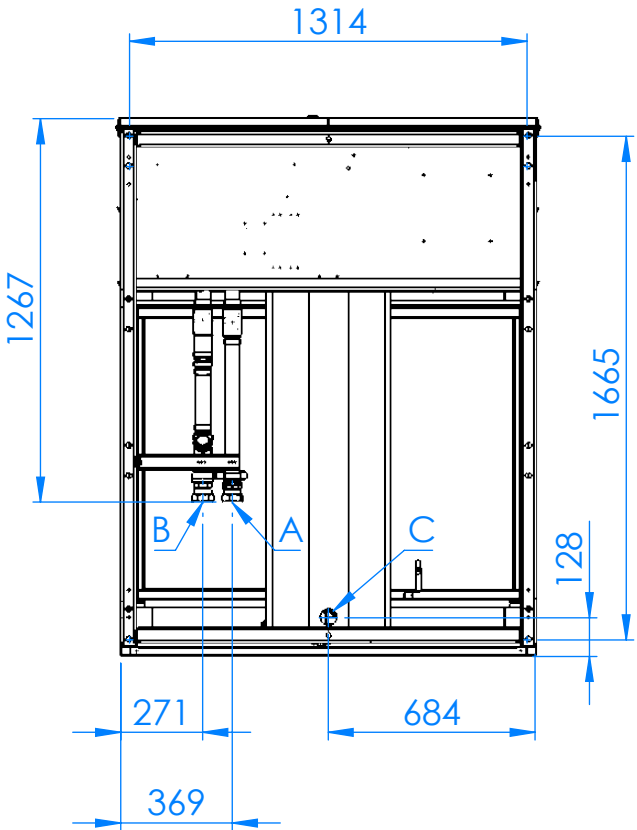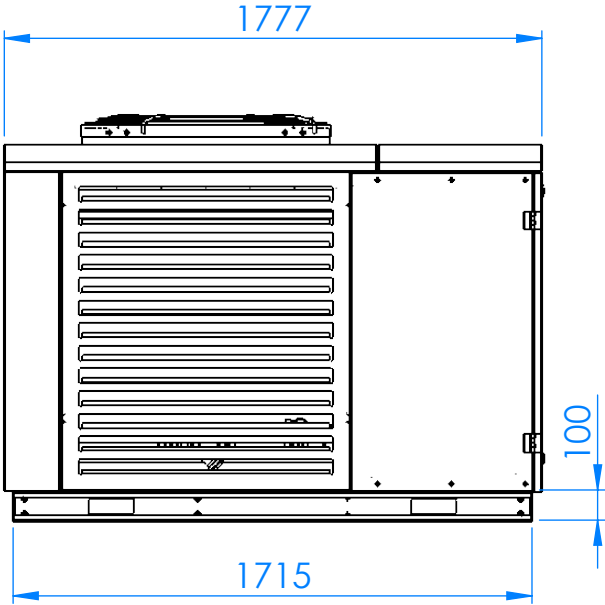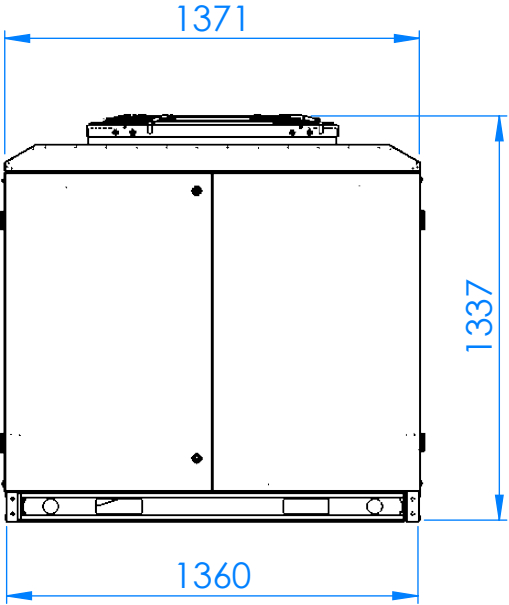

- A -   
- B -   
- C - Condens

