



Heat pump



AW 500 EVI HeavyDuty 2L5

WAMAK AW 500 EVI HeavyDuty 2L5

Product description

Industrial high-efficiency heat pump with split design with indoor and outdoor unit. Robust Scroll compressors (2 to 6 units) are located in the indoor unit and in turn the heat exchangers and fans are located outside the building. The split design allows installation even in more challenging conditions during renovations where the energy source is located further away from the utility room. Wide range of applications from heating and cooling of office or multifunctional buildings to industrial applications in cascade connection.

Use for demanding industrial applications. By combining the most suitable performance and application variants of heat pump modules, it is possible to tailor-make the complete system required. Each module is refrigeration, hydraulically and electrically isolated with a separate controller. The connection of the modules is cascaded, whereby each single controller can take over the function of the cascade master.

The primary source is the heat energy from the ambient air, which is blown by a silent fan in the shape of an owl's wing through a heat exchanger made of copper and aluminium.

The EVI (Enhanced Vapour Injection) technology allows the heat pump to achieve higher header flow temperatures even at lower source temperatures. EVI also has a positive impact on the compressor lifespan and overall system stability because the discharge gas temperature from the compressor is lower.

The APS (Active Process Subcooling) system simultaneously increases the stability and efficiency of operation by additional utilisation of the liquid refrigerant temperature after it has condensed.

Split system (compressor indoors)

Product features

- Scroll compressor
- EVI technology
- Asymetric plate heat exchanger
- Multi-stage capacity control
- Reversible defrosting
- Speed - controlled EC fan
- Phase and rotation control
- High pressure sensor - analogue
- Flow switch consumer - on/off - (with accessory)
- Plate exchanger protection HG-BYPASS
- DHW temperature sensor - (with accessory)
- Cascade control
- Solid frame structure
- Sylomer pads under compressor unit
- Electronic expansion valve
- Large air heat exchanger with APS system
- Active cooling
- Enhanced defrosting with APS system
- Heated drip tray - (with accessory)
- High pressure switch
- Low pressure sensor - analogue
- Flow sensor consumer - analogue - (with accessory)
- Outdoor temperature sensor - (with accessory)
- Buffer temperature sensor - (with accessory)
- Modbus connection
- Two level frame

Basic performance data - WAMAK AW 500 EVI HeavyDuty 2L5

Heating - EN 14511		
Heating capacity [kW]	A7 / W35	490.9 (49.1 / 490.9)
	A2 / W35	417.0 (41.7 / 417.0)
	A-7 / W34	349.9 (35.0 / 349.9)
Electrical power input [kW]	A7 / W35	113.8 (10.6 / 113.8)
	A2 / W35	113.7 (10.6 / 113.7)
	A-7 / W34	110.5 (10.3 / 110.5)
Heating efficiency faktor [COP]	A7 / W35	4.31
	A2 / W35	3.67
	A-7 / W34	3.17
Seasonal space heating energy efficiency - SCOP EN 14825		
Average Climate / Low Temperature [35°C]	SCOP	4.24
	η [%]	169.6
	Label	A+++
	Qhe [kWh]	819582.2
	Pdesignh [kW]	396.7
	Tbivalent [°C]	-7
Cooling		
Cooling capacity - [kW]	A35 / W23-18	484.3
	A25 / W23-18	509.0
	A35 / W12-7	363.8
	A25 / W12-7	363.8
Seasonal space cooling energy efficiency - SEER EN 14825		
[W 23 / 18°C]	SEER	4.55
	Qce [kWh]	218280.0
	η_c [%]	182.2
Sound EN 12102		
Acoustic power - Lw	dB(A)	77.1
Acoustic pressure - Lp	1 m dB(A)	69.1
	5 m dB(A)	55.1
	10 m dB(A)	49.1
Mechanical and operational information		
Compressor type (3~ 400/50)	SCROLL / 10 /	On/Off
Refrigerant	R410A (GWP - 2088)	10 x 9.6 kg
Operating limit temperatures heating - (min / max) [°C]	25 / 65	
Operating limit temperatures source - (min / max) [°C]	-22 / 40	
Weight	3150 kg	

Main technical data - WAMAK AW 500 EVI HeavyDuty 2L5

Enclosure type			Heat energy rejection side data		
Basic dimensions	Height [mm]	2000	Operating limit temperatures heating	MAX [°C]	65
	Width [mm]	3450		MIN [°C]	25
	Length [mm]	1200	for more see operating limits diagram		
Weight [kg]		3150	Condenser	Port size	10 x 2 "
Colour		Gray		Type	BPHE
Enclosure IP Class		IP20		Count	10
				Material	AISI 316
Refrigeration cycle					
Compressor	Type	Scroll	Maximal operating pressure - refrigerant [bar]		50
	Number of stages	10	Maximal operating pressure - Water [bar]		6
	On/Off		Testing pressure [bar]		70
	Power factor Cosφ	0.64	Heat transfer medium		Water
	Winding resistance	0.76 Ohm	Volume flow @ dT 5K (nom) - Water [m3/h]		8.48 ~ 84.77
Refrigerant		R410A	Internal pressure drop - Water [kPa]		10 x 20
	Volme	10 x 9.6 kg	Temperature difference	@ 35°C (nom)	5 K
	GWP	2088		@ 55°C	8 K
	Safety class	A1		@ 65°C	10 K
Refrigeration oil type	POE RL32-3MAF		Renewable energy extraction side data		
	Oil volume	10 x 3.38 L	Operating limit temperatures source	MIN [°C]	-22
Maximal pressure - refrigerant [bar]		50		MAX [°C]	40
	PED class	2	for more see operating limits diagram		
EVI - vapour injection with economizer			Evaporator	Port size	10 x (7/8" - 1.3/8") "
APS System of liquid subcooling				Type	Cu-coil /Al-fin
Reversible operation (cooling)				Count	10
Reverse defrosting with hot gas				Material	Cu/Al
Plate exchanger protection HG-BYPASS			Maximal operating pressure - refrigerant [bar]		29
Electrical connection data			Heat transfer medium		Air
Line voltage [#~ V/Hz]		3~ 400/50	Volume flow - Air [m3/h]		15072 ~ 150720
Current	nominal [A]	235.30	Internal pressure drop - Air [kPa]		10 x 0.061
	maximal [A]	374.00	Temperature difference - Air		7 K
	starting [A]	57.2	Possible outdoor units		
Softstart		-		5 x VOV900X2-FRAME	
Main safety		C400		10 x VOII-1200-2LOW	
Control System				10 x VOII-1200-2HIGH	
Main controller	SIEMENS	RVS 21 AVS 55.199		10 x VOII-1200-2LOW-DUCT	
Extension module	AVS75.3xx	AVS75.3xx		10 x VOII-1200-2HIGH-DUCT	
Bus Clip-In		LPB OCI346	Split System (compressor indoors)		
		Modbus OCI352	Liquid line dimension (up to 8 meters IU/OU)		10 x 7/8"
Online connection		Web server OZW672	Suction line dimension (up to 8 meters IU/OU)		10 x 1.3/8"
Superheat controller		SEC61	Surcharge of refrigerant over 8 meter distance IU/OU		10 x 0.35 kg/m IU/OU
*** with accessory			air - water SPLIT heat pumps indoor units are delivered without full refrigerant charge only with residual overpressure from testing		

WAMAK AW 500 EVI HeavyDuty 2L5

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	AW 500 EVI HeavyDuty 2L5
Air-to-water heat pump	yes
Brine-to-water heat pump	no
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	low (35 °C - 30 °C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	396.7	kW	Seasonal space heating energy efficiency	ηs	169.6	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	349.9	kW	Tj = -7 °C	COPd	3.17	-
Tj = +2 °C	Pdh	412.5	kW	Tj = +2 °C	COPd	4.1	-
Tj = +7 °C	Pdh	485.9	kW	Tj = +7 °C	COPd	5.1	-
Tj = +12 °C	Pdh	574.5	kW	Tj = +12 °C	COPd	6.4	-
Tj = bivalent temperature	Pdh	344.0	kW	Tj = bivalent temperature	COPd	3.1	-
Tj = operation limit temperature	Pdh	250.9	kW	Tj = operation limit temperature	COPd	2.3	-
Bivalent temperature	Tbiv	-7	°C	Tj = operation limit temperature	TOL	-22	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.040	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	175.9	kW
Standby mode	Psb	0.010	kW	Type of energy input		electricity	
Crankcase heater mode	Pck	0.050	kW				
Other items							
Capacity control		multi-stage		For air-to-water heat pumps: Rated air flow rate, outdoors	-	15072 ~ 150720	m3/h
Sound power level				For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	---	m3/h
indoors	Lwa	77	dB				
outdoors	Lwa	82	dB				
Annual energy consumption	QHE	819582.2	kWh				

Contact details: WAMAK, s.r.o., Orovnic 252, 96652, Orovnic, Slovakia, info@wamak.sk

WAMAK AW 500 EVI HeavyDuty 2L5

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	AW 500 EVI HeavyDuty 2L5
Air-to-water heat pump	yes
Brine-to-water heat pump	no
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	middle (55 °C - 47 °C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	416.2	kW	Seasonal space heating energy efficiency	ηs	132.6	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	365.7	kW	Tj = -7 °C	COPd	2.24	-
Tj = +2 °C	Pdh	422.5	kW	Tj = +2 °C	COPd	3.2	-
Tj = +7 °C	Pdh	491.4	kW	Tj = +7 °C	COPd	4.2	-
Tj = +12 °C	Pdh	575.7	kW	Tj = +12 °C	COPd	5.6	-
Tj = bivalent temperature	Pdh	361.3	kW	Tj = bivalent temperature	COPd	2.1	-
Tj = operation limit temperature	Pdh	264.5	kW	Tj = operation limit temperature	COPd	1.6	-
Bivalent temperature	Tbiv	-7	°C	Tj = operation limit temperature	TOL	-22	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.040	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	175.9	kW
Standby mode	Psb	0.010	kW	Type of energy input		electricity	
Crankcase heater mode	Pck	0.050	kW				
Other items							
Capacity control		multi-stage		For air-to-water heat pumps: Rated air flow rate, outdoors	-	15072 ~ 150720	m3/h
Sound power level				For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	---	m3/h
indoors	Lwa	77	dB				
outdoors	Lwa	82	dB				
Annual energy consumption	QHE	859869.2	kWh				

Contact details: WAMAK, s.r.o., Orovnica 252, 96652, Orovnica, Slovakia, info@wamak.sk



ENERG

енергия - ενεργεια



WAMAK

AW 500 EVI

HeavyDuty 2L5



55 °C

35 °C

A+++

A++

A+

A

B

C

D

A++

A+++



77 dB



82 dB

438
417
408
kW

405
397
377
kW



2019

811/2013

AW 500 EVI HeavyDuty

2L5

ErP Data

55 °C

35 °C

Energy class

A++

A+++

η [%]

132.6

169.6

P_{rated} [kW]

417

397

Q_{HE} [kWh/y]

859870

819583

SCOP [-]

3.32

4.24

$T_{bivalent}$ [°C]

-7

-7

CONTROLLER



+ QAA55/75

class VII

3.5% ↓

- QAA55/75

class III

1.5% ↓

Heating performance data

Version: v2024.004-AW

Average Climate / Low Temperature [35°C]

ZHI46K1P-TWD_R410A_10_AW

Operating conditions		Qh	P	COP
1	A7 / W30-35	490.9	113.8	4.31
2	A2 / W35	417.0	113.7	3.67
3	A-22 / W35	250.9	108.4	2.31
A	A-7 / W34	349.9	110.5	3.17
B	A2 / W30	412.5	101.6	4.06
C	A7 / W27	485.9	95.1	5.11
D	A12 / W24	574.5	89.6	6.41
E	A-10 / W35	344.0	112.8	3.05
F	A-7 / W34	349.9	110.5	3.17

SCOP DATA EN 14825:2018	
Average Climate / Low Temperature [35°C]	
SCOPon	4.25
SCOPnet	4.28
SCOP	4.24
η [%]	169.56
Label	A+++
Qh [kWh]	819582.20
Pdesignh [kW]	396.7
Tbivalent [°C]	-7.00

Average Climate / Medium Temperature [55°C]

Operating conditions		Qh	P	COP
1	A7 / W47-55	500.9	178.5	2.81
2	A2 / W55	432.1	177.2	2.44
3	A-22 / W55	264.5	151.6	1.62
A	A-7 / W52	365.7	163.2	2.24
B	A2 / W42	422.5	132.7	3.18
C	A7 / W36	491.4	116.4	4.22
D	A12 / W30	575.7	102.1	5.64
E	A-10 / W55	361.3	173.9	2.08
F	A-7 / W55	368.2	174.4	2.11

SCOP DATA EN 14825:2018	
Average Climate / Medium Temperature [55°C]	
SCOPon	3.32
SCOPnet	3.34
SCOP	3.32
η [%]	132.61
Label	A++
Qh [kWh]	859869.20
Pdesignh [kW]	416.2
Tbivalent [°C]	-7.00

Cooling performance data

Low temperature cooling W 12 / 7°C

Operating conditions		Qc	P	EER
A	A35 / W12-7	363.8	135.9	2.68
B	A30 / W12-7	373.9	121.7	3.07
C	A25 / W12-7	382.4	108.9	3.51
D	A20 / W12-7	389.3	97.3	4.00

SEER DATA EN 14825:2018 [W 12 / 7°C]	
SEERon	3.43
SEER	3.42
Qc [kWh]	218280.00
η [%]	136.91

Radiant cooling W 23 / 18°C

Operating conditions		Qc	P	EER
A	A35 / W23-18	484.3	135.9	3.56
B	A30 / W23-18	497.4	112.6	4.09
C	A25 / W23-18	509.0	101.2	4.67
D	A20 / W23-18	519.1	91.0	5.34


SEER DATA EN 14825:2018 [W 23 / 18°C]	
SEERon	4.57
SEER	4.55
Qc [kWh]	218280.00
η [%]	182.20

WAMAK AW 500 EVI HeavyDuty 2L5

Performance lines - heating


ZHI46K1P-TWD_R410A_10_AW

- Qh-nom-35 Qh-min-35 Qh-max-65 Qh-nom-45 Qh-nom-55
Qh-nom-65 Pratedh-35 Pratedh-55

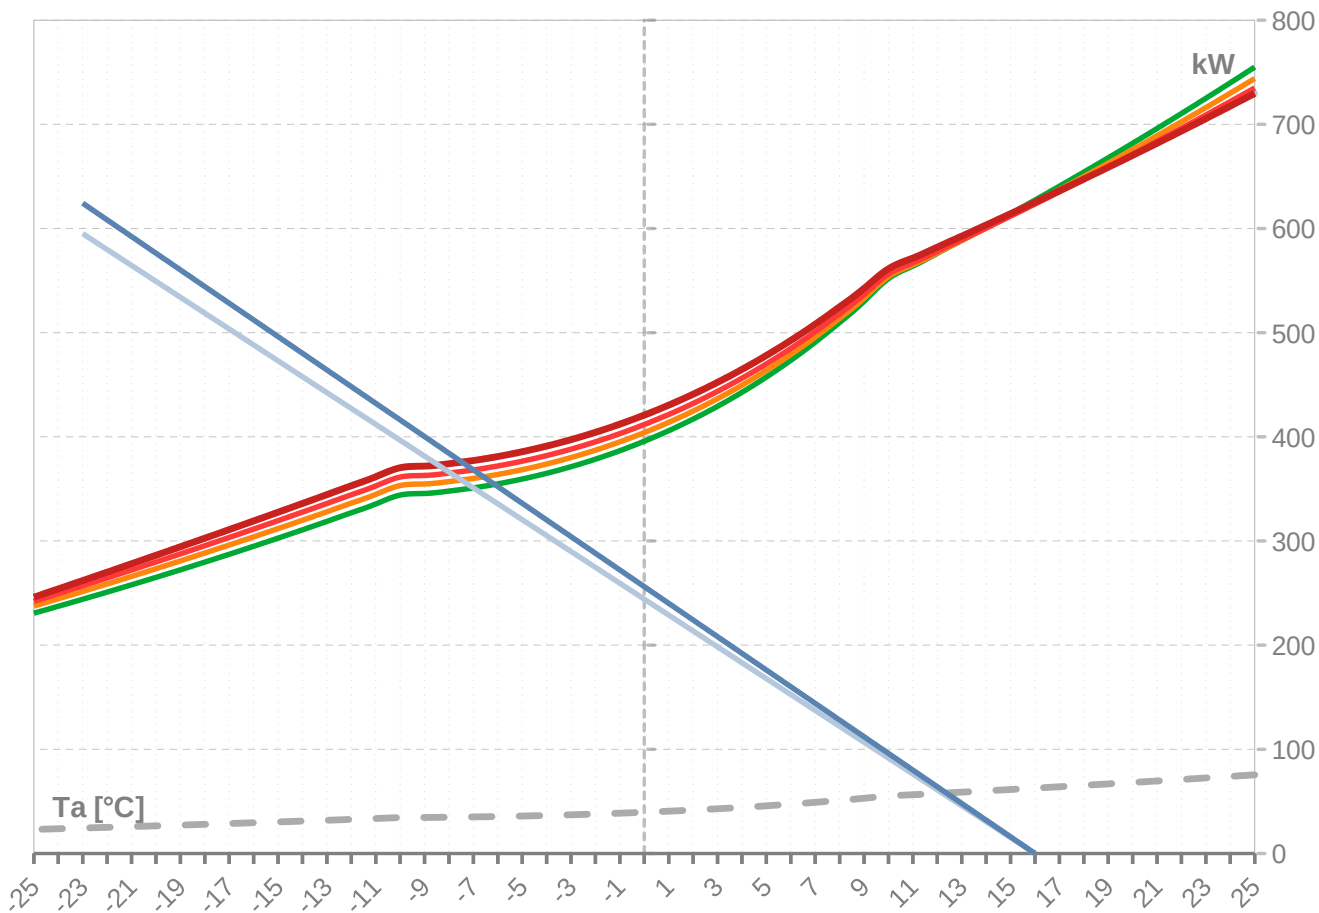

Performance lines - cooling

- Pratedc Qc-12/7 Qc-23/18

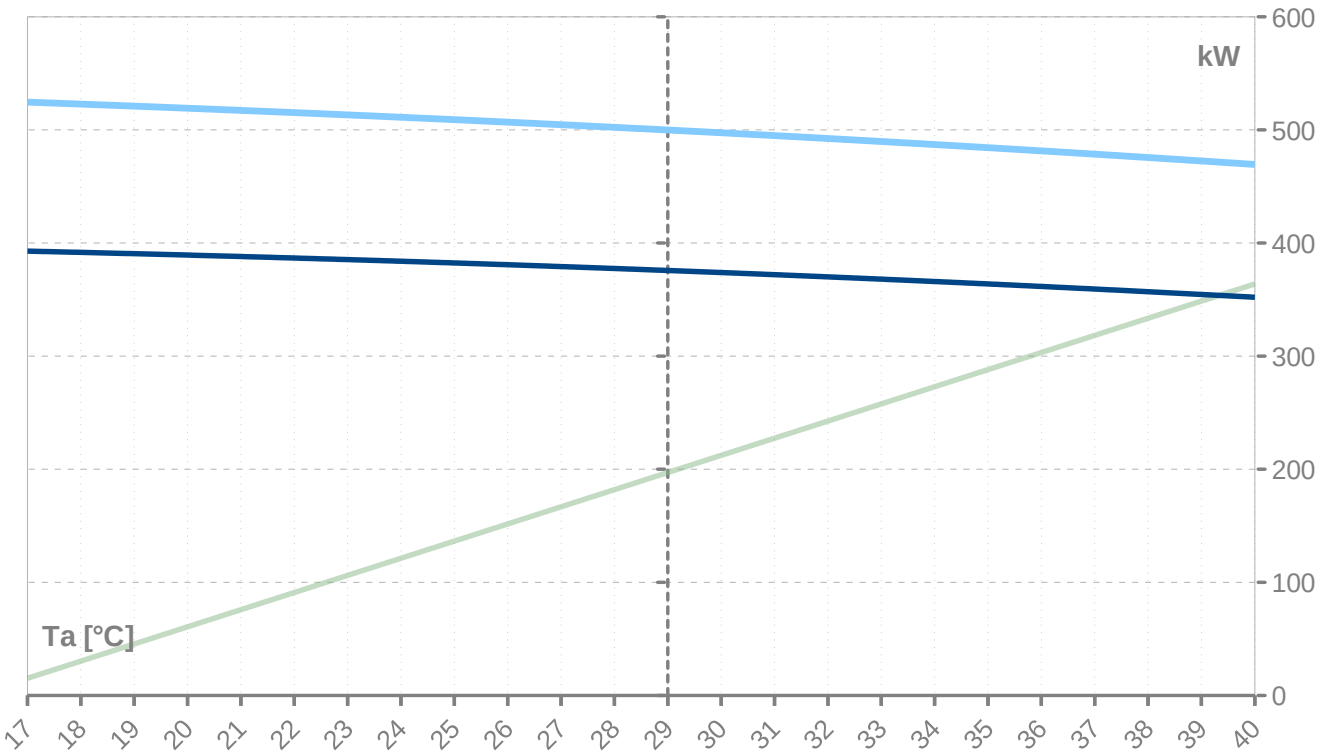

Th [°C]		35 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
24	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
23	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
22	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
21	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
20	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
19	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
18	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
17	640.6	64.1		113.9	10.6		5.62	232.7	23.3	
16	627.3	62.7	627.3	113.9	10.6	113.9	5.51	232.9	23.3	232.9
15	614.2	61.4	614.2	113.8	10.6	113.8	5.40	233.1	23.3	233.1
14	601.3	60.1	601.3	113.8	10.6	113.8	5.28	233.3	23.3	233.3
13	588.6	58.9	588.6	113.8	10.6	113.8	5.17	233.5	23.4	233.5
12	576.2	57.6	576.2	113.8	10.6	113.8	5.06	233.8	23.4	233.8
11	563.9	56.4	563.9	113.8	10.6	113.8	4.96	234.0	23.4	234.0
10	551.8	55.2	551.8	113.8	10.6	113.8	4.85	234.3	23.4	234.3
9	530.1	53.0	530.1	113.8	10.6	113.8	4.66	234.8	23.5	234.8
8	509.8	51.0	509.8	113.8	10.6	113.8	4.48	235.3	23.5	235.3
7	490.9	49.1	490.9	113.8	10.6	113.8	4.31	235.7	23.6	235.7
6	473.5	47.3	473.5	113.8	10.6	113.8	4.16	236.2	23.6	236.2
5	457.4	45.7	457.4	113.8	10.6	113.8	4.02	236.5	23.7	236.5
4	442.7	44.3	442.7	113.8	10.6	113.8	3.89	236.8	23.7	236.8
3	429.3	42.9	429.3	113.8	10.6	113.8	3.77	237.0	23.7	237.0
2	417.0	41.7	417.0	113.7	10.6	113.7	3.67	237.2	23.7	237.2
1	405.9	40.6	405.9	113.6	10.6	113.6	3.57	237.4	23.7	237.4
0	395.7	39.6	395.7	113.6	10.6	113.6	3.49	237.4	23.7	237.4
-1	386.6	38.7	386.6	113.5	10.6	113.5	3.41	237.5	23.7	237.5
-2	378.5	37.9	378.5	113.4	10.6	113.4	3.34	237.5	23.7	237.5
-3	371.3	37.1	371.3	113.3	10.6	113.3	3.28	237.5	23.7	237.5
-4	364.9	36.5	364.9	113.2	10.6	113.2	3.22	237.4	23.7	237.4
-5	359.5	35.9	359.5	113.1	10.6	113.1	3.18	237.4	23.7	237.4
-6	354.8	35.5	354.8	113.0	10.6	113.0	3.14	237.3	23.7	237.3
-7	350.9	35.1	350.9	112.9	10.6	112.9	3.11	237.2	23.7	237.2
-8	347.9	34.8	347.9	112.9	10.6	112.9	3.08	237.2	23.7	237.2
-9	345.6	34.6	345.6	112.8	10.5	112.8	3.06	237.1	23.7	237.1
-10	344.0	34.4	344.0	112.8	10.5	112.8	3.05	237.1	23.7	237.1
-11	335.5	33.5	335.5	112.6	10.5	112.6	2.98	236.9	23.7	236.9
-12	327.1	32.7	327.1	112.3	10.5	112.3	2.91	236.6	23.7	236.6
-13	318.8	31.9	318.8	112.1	10.5	112.1	2.84	236.2	23.6	236.2
-14	310.7	31.1	310.7	111.8	10.5	111.8	2.78	235.8	23.6	235.8
-15	302.7	30.3	302.7	111.5	10.4	111.5	2.72	235.3	23.5	235.3
-16	294.9	29.5	294.9	111.1	10.4	111.1	2.65	234.8	23.5	234.8
-17	287.2	28.7	287.2	110.8	10.4	110.8	2.59	234.2	23.4	234.2
-18	279.7	28.0	279.7	110.4	10.3	110.4	2.53	233.5	23.3	233.5
-19	272.3	27.2	272.3	109.9	10.3	109.9	2.48	232.7	23.3	232.7
-20	265.0	26.5	265.0	109.4	10.2	109.4	2.42	231.8	23.2	231.8
-21	257.9	25.8	257.9	108.9	10.2	108.9	2.37	230.9	23.1	230.9
-22	250.9	25.1	250.9	108.4	10.1	108.4	2.31	229.9	23.0	229.9
-23	244.0	24.4	244.0	107.8	10.1	107.8	2.26	228.7	22.9	228.7
-24	237.3	23.7	237.3	107.2	10.0	107.2	2.21	227.5	22.8	227.5
-25	230.7	23.1	230.7	106.5	10.0	106.5	2.17	226.2	22.6	226.2

* attention: operating limits not reflected in performance table

Th [°C]		45 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	744.0	74.4	744.0	141.1	13.2	141.1	5.27	265.3	26.5	265.3
24	729.9	73.0	729.9	141.1	13.2	141.1	5.17	265.2	26.5	265.2
23	716.1	71.6	716.1	141.2	13.2	141.2	5.07	265.2	26.5	265.2
22	702.5	70.2	702.5	141.2	13.2	141.2	4.98	265.2	26.5	265.2
21	689.0	68.9	689.0	141.2	13.2	141.2	4.88	265.2	26.5	265.2
20	675.8	67.6	675.8	141.3	13.2	141.3	4.78	265.3	26.5	265.3
19	662.8	66.3	662.8	141.4	13.2	141.4	4.69	265.4	26.5	265.4
18	649.9	65.0	649.9	141.4	13.2	141.4	4.60	265.4	26.5	265.4
17	637.2	63.7	637.2	141.5	13.2	141.5	4.50	265.5	26.6	265.5
16	624.8	62.5	624.8	141.6	13.2	141.6	4.41	265.6	26.6	265.6
15	612.5	61.2	612.5	141.6	13.2	141.6	4.32	265.7	26.6	265.7
14	600.4	60.0	600.4	141.7	13.2	141.7	4.24	265.8	26.6	265.8
13	588.4	58.8	588.4	141.8	13.3	141.8	4.15	266.0	26.6	266.0
12	576.7	57.7	576.7	141.8	13.3	141.8	4.07	266.1	26.6	266.1
11	565.1	56.5	565.1	141.9	13.3	141.9	3.98	266.2	26.6	266.2
10	553.7	55.4	553.7	142.0	13.3	142.0	3.90	266.3	26.6	266.3
9	533.0	53.3	533.0	142.1	13.3	142.1	3.75	266.4	26.6	266.4
8	513.8	51.4	513.8	142.1	13.3	142.1	3.62	266.5	26.7	266.5
7	495.7	49.6	495.7	142.1	13.3	142.1	3.49	266.5	26.7	266.5
6	479.1	47.9	479.1	142.1	13.3	142.1	3.37	266.5	26.7	266.5
5	463.7	46.4	463.7	142.1	13.3	142.1	3.26	266.4	26.6	266.4
4	449.6	45.0	449.6	142.0	13.3	142.0	3.17	266.2	26.6	266.2
3	436.6	43.7	436.6	141.9	13.3	141.9	3.08	266.0	26.6	266.0
2	424.7	42.5	424.7	141.7	13.3	141.7	3.00	265.7	26.6	265.7
1	413.9	41.4	413.9	141.6	13.2	141.6	2.92	265.4	26.5	265.4
0	404.0	40.4	404.0	141.4	13.2	141.4	2.86	265.0	26.5	265.0
-1	395.1	39.5	395.1	141.2	13.2	141.2	2.80	264.7	26.5	264.7
-2	387.2	38.7	387.2	141.0	13.2	141.0	2.74	264.3	26.4	264.3
-3	380.1	38.0	380.1	140.9	13.2	140.9	2.70	263.9	26.4	263.9
-4	373.8	37.4	373.8	140.7	13.2	140.7	2.66	263.5	26.4	263.5
-5	368.4	36.8	368.4	140.5	13.1	140.5	2.62	263.1	26.3	263.1
-6	363.8	36.4	363.8	140.4	13.1	140.4	2.59	262.8	26.3	262.8
-7	360.0	36.0	360.0	140.2	13.1	140.2	2.57	262.5	26.3	262.5
-8	357.0	35.7	357.0	140.1	13.1	140.1	2.55	262.3	26.2	262.3
-9	354.7	35.5	354.7	140.0	13.1	140.0	2.53	262.1	26.2	262.1
-10	353.2	35.3	353.2	140.0	13.1	140.0	2.52	262.0	26.2	262.0
-11	344.7	34.5	344.7	139.6	13.1	139.6	2.47	261.2	26.1	261.2
-12	336.3	33.6	336.3	139.2	13.0	139.2	2.42	260.4	26.0	260.4
-13	328.0	32.8	328.0	138.8	13.0	138.8	2.36	259.5	25.9	259.5
-14	319.9	32.0	319.9	138.3	12.9	138.3	2.31	258.5	25.8	258.5
-15	311.8	31.2	311.8	137.8	12.9	137.8	2.26	257.4	25.7	257.4
-16	303.9	30.4	303.9	137.2	12.8	137.2	2.21	256.2	25.6	256.2
-17	296.1	29.6	296.1	136.7	12.8	136.7	2.17	254.9	25.5	254.9
-18	288.4	28.8	288.4	136.0	12.7	136.0	2.12	253.6	25.4	253.6
-19	280.8	28.1	280.8	135.3	12.7	135.3	2.07	252.1	25.2	252.1
-20	273.4	27.3	273.4	134.6	12.6	134.6	2.03	250.6	25.1	250.6
-21	266.0	26.6	266.0	133.9	12.5	133.9	1.99	248.9	24.9	248.9
-22	258.7	25.9	258.7	133.1	12.4	133.1	1.94	247.2	24.7	247.2
-23	251.5	25.2	251.5	132.2	12.4	132.2	1.90	245.3	24.5	245.3
-24	244.5	24.4	244.5	131.3	12.3	131.3	1.86	243.3	24.3	243.3
-25	237.5	23.7	237.5	130.3	12.2	130.3	1.82	241.2	24.1	241.2

* attention: operating limits not reflected in performance table

WAMAK AW 500 EVI HeavyDuty 2L5

Th [°C]		55 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	735.0	73.5	735.0	177.2	16.6	177.2	4.15	306.5	30.7	306.5
24	721.9	72.2	721.9	177.4	16.6	177.4	4.07	306.6	30.7	306.6
23	709.0	70.9	709.0	177.5	16.6	177.5	3.99	306.7	30.7	306.7
22	696.3	69.6	696.3	177.6	16.6	177.6	3.92	306.8	30.7	306.8
21	683.7	68.4	683.7	177.7	16.6	177.7	3.85	306.9	30.7	306.9
20	671.3	67.1	671.3	177.8	16.6	177.8	3.77	307.0	30.7	307.0
19	659.1	65.9	659.1	178.0	16.6	178.0	3.70	307.1	30.7	307.1
18	647.1	64.7	647.1	178.1	16.6	178.1	3.63	307.2	30.7	307.2
17	635.2	63.5	635.2	178.2	16.7	178.2	3.56	307.3	30.7	307.3
16	623.4	62.3	623.4	178.3	16.7	178.3	3.50	307.4	30.7	307.4
15	611.9	61.2	611.9	178.4	16.7	178.4	3.43	307.5	30.8	307.5
14	600.4	60.0	600.4	178.4	16.7	178.4	3.36	307.6	30.8	307.6
13	589.2	58.9	589.2	178.5	16.7	178.5	3.30	307.7	30.8	307.7
12	578.0	57.8	578.0	178.6	16.7	178.6	3.24	307.7	30.8	307.7
11	567.1	56.7	567.1	178.6	16.7	178.6	3.17	307.7	30.8	307.7
10	556.2	55.6	556.2	178.6	16.7	178.6	3.11	307.7	30.8	307.7
9	536.6	53.7	536.6	178.6	16.7	178.6	3.00	307.6	30.8	307.6
8	518.2	51.8	518.2	178.6	16.7	178.6	2.90	307.5	30.7	307.5
7	500.9	50.1	500.9	178.5	16.7	178.5	2.81	307.2	30.7	307.2
6	484.9	48.5	484.9	178.3	16.7	178.3	2.72	306.8	30.7	306.8
5	470.0	47.0	470.0	178.1	16.7	178.1	2.64	306.4	30.6	306.4
4	456.3	45.6	456.3	177.9	16.6	177.9	2.57	305.8	30.6	305.8
3	443.7	44.4	443.7	177.6	16.6	177.6	2.50	305.2	30.5	305.2
2	432.1	43.2	432.1	177.2	16.6	177.2	2.44	304.6	30.5	304.6
1	421.5	42.1	421.5	176.9	16.5	176.9	2.38	303.9	30.4	303.9
0	411.8	41.2	411.8	176.6	16.5	176.6	2.33	303.2	30.3	303.2
-1	403.0	40.3	403.0	176.2	16.5	176.2	2.29	302.4	30.2	302.4
-2	395.2	39.5	395.2	175.8	16.4	175.8	2.25	301.7	30.2	301.7
-3	388.1	38.8	388.1	175.5	16.4	175.5	2.21	301.0	30.1	301.0
-4	381.9	38.2	381.9	175.2	16.4	175.2	2.18	300.3	30.0	300.3
-5	376.6	37.7	376.6	174.9	16.3	174.9	2.15	299.7	30.0	299.7
-6	372.0	37.2	372.0	174.6	16.3	174.6	2.13	299.2	29.9	299.2
-7	368.2	36.8	368.2	174.4	16.3	174.4	2.11	298.7	29.9	298.7
-8	365.1	36.5	365.1	174.2	16.3	174.2	2.10	298.3	29.8	298.3
-9	362.9	36.3	362.9	174.0	16.3	174.0	2.09	298.0	29.8	298.0
-10	361.3	36.1	361.3	173.9	16.3	173.9	2.08	297.8	29.8	297.8
-11	352.8	35.3	352.8	173.3	16.2	173.3	2.04	296.5	29.7	296.5
-12	344.3	34.4	344.3	172.7	16.1	172.7	1.99	295.2	29.5	295.2
-13	336.0	33.6	336.0	172.0	16.1	172.0	1.95	293.8	29.4	293.8
-14	327.7	32.8	327.7	171.2	16.0	171.2	1.91	292.3	29.2	292.3
-15	319.5	31.9	319.5	170.5	15.9	170.5	1.87	290.7	29.1	290.7
-16	311.4	31.1	311.4	169.6	15.9	169.6	1.84	288.9	28.9	288.9
-17	303.4	30.3	303.4	168.7	15.8	168.7	1.80	287.1	28.7	287.1
-18	295.5	29.5	295.5	167.8	15.7	167.8	1.76	285.2	28.5	285.2
-19	287.6	28.8	287.6	166.8	15.6	166.8	1.72	283.1	28.3	283.1
-20	279.8	28.0	279.8	165.7	15.5	165.7	1.69	280.9	28.1	280.9
-21	272.1	27.2	272.1	164.6	15.4	164.6	1.65	278.7	27.9	278.7
-22	264.5	26.4	264.5	163.5	15.3	163.5	1.62	276.2	27.6	276.2
-23	256.9	25.7	256.9	162.2	15.2	162.2	1.58	273.7	27.4	273.7
-24	249.4	24.9	249.4	161.0	15.0	161.0	1.55	271.0	27.1	271.0
-25	242.0	24.2	242.0	159.6	14.9	159.6	1.52	268.2	26.8	268.2

* attention: operating limits not reflected in performance table

WAMAK AW 500 EVI HeavyDuty 2L5

Th [°C]		T-Max @ 65 °C								
Ta [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin-min [kW]	Pin-max [kW]	COP kW / kW	I nom [A]	I min [A]	I max [A]
25	729.7	73.0	729.7	226.0	21.1	226.0	3.23	361.4	36.1	361.4
24	717.5	71.8	717.5	226.1	21.1	226.1	3.17	361.7	36.2	361.7
23	705.5	70.5	705.5	226.2	21.2	226.2	3.12	361.9	36.2	361.9
22	693.6	69.4	693.6	226.4	21.2	226.4	3.06	362.2	36.2	362.2
21	681.8	68.2	681.8	226.5	21.2	226.5	3.01	362.4	36.2	362.4
20	670.2	67.0	670.2	226.6	21.2	226.6	2.96	362.7	36.3	362.7
19	658.7	65.9	658.7	226.7	21.2	226.7	2.91	362.9	36.3	362.9
18	647.4	64.7	647.4	226.7	21.2	226.7	2.86	363.1	36.3	363.1
17	636.2	63.6	636.2	226.8	21.2	226.8	2.81	363.3	36.3	363.3
16	625.1	62.5	625.1	226.8	21.2	226.8	2.76	363.5	36.3	363.5
15	614.2	61.4	614.2	226.9	21.2	226.9	2.71	363.6	36.4	363.6
14	603.4	60.3	603.4	226.9	21.2	226.9	2.66	363.7	36.4	363.7
13	592.7	59.3	592.7	226.8	21.2	226.8	2.61	363.8	36.4	363.8
12	582.1	58.2	582.1	226.8	21.2	226.8	2.57	363.8	36.4	363.8
11	571.6	57.2	571.6	226.7	21.2	226.7	2.52	363.9	36.4	363.9
10	561.3	56.1	561.3	226.7	21.2	226.7	2.48	363.8	36.4	363.8
9	542.5	54.2	542.5	226.4	21.2	226.4	2.40	363.6	36.4	363.6
8	524.8	52.5	524.8	226.1	21.1	226.1	2.32	363.3	36.3	363.3
7	508.1	50.8	508.1	225.7	21.1	225.7	2.25	362.9	36.3	362.9
6	492.6	49.3	492.6	225.3	21.1	225.3	2.19	362.3	36.2	362.3
5	478.1	47.8	478.1	224.8	21.0	224.8	2.13	361.6	36.2	361.6
4	464.7	46.5	464.7	224.2	21.0	224.2	2.07	360.7	36.1	360.7
3	452.3	45.2	452.3	223.7	20.9	223.7	2.02	359.9	36.0	359.9
2	440.9	44.1	440.9	223.1	20.9	223.1	1.98	358.9	35.9	358.9
1	430.4	43.0	430.4	222.4	20.8	222.4	1.94	357.9	35.8	357.9
0	420.9	42.1	420.9	221.8	20.7	221.8	1.90	356.9	35.7	356.9
-1	412.1	41.2	412.1	221.2	20.7	221.2	1.86	355.9	35.6	355.9
-2	404.3	40.4	404.3	220.6	20.6	220.6	1.83	354.9	35.5	354.9
-3	397.3	39.7	397.3	220.0	20.6	220.0	1.81	353.9	35.4	353.9
-4	391.1	39.1	391.1	219.5	20.5	219.5	1.78	353.0	35.3	353.0
-5	385.7	38.6	385.7	219.0	20.5	219.0	1.76	352.2	35.2	352.2
-6	381.0	38.1	381.0	218.6	20.4	218.6	1.74	351.5	35.1	351.5
-7	377.2	37.7	377.2	218.2	20.4	218.2	1.73	350.8	35.1	350.8
-8	374.1	37.4	374.1	217.9	20.4	217.9	1.72	350.3	35.0	350.3
-9	371.8	37.2	371.8	217.7	20.3	217.7	1.71	349.9	35.0	349.9
-10	370.3	37.0	370.3	217.5	20.3	217.5	1.70	349.6	35.0	349.6
-11	361.6	36.2	361.6	216.6	20.2	216.6	1.67	348.0	34.8	348.0
-12	353.0	35.3	353.0	215.6	20.2	215.6	1.64	346.2	34.6	346.2
-13	344.5	34.4	344.5	214.6	20.1	214.6	1.61	344.4	34.4	344.4
-14	336.0	33.6	336.0	213.5	20.0	213.5	1.57	342.4	34.2	342.4
-15	327.6	32.8	327.6	212.3	19.8	212.3	1.54	340.3	34.0	340.3
-16										
-17										
-18										
-19										
-20										
-21										
-22										
-23										
-24										
-25										

* attention: operating limits not reflected in performance table

WAMAK AW 500 EVI HeavyDuty 2L5







Tc [°C]		W 12 / 7 °C								
Ta [°C]	Qc nom [kW]	Qc min [kW]	Qc max [kW]	Pin [kW]	Pin min [kW]	Pin max [kW]	EER kW / kW	I nom [A]	I min [A]	I max [A]
40	352.0	352.0	352.0	152.0	142.1	152.0	2.32	277.4	277.4	277.4
39	354.5	354.5	354.5	148.7	139.0	148.7	2.38	273.7	273.7	273.7
38	357.0	357.0	357.0	145.4	135.9	145.4	2.46	270.0	270.0	270.0
37	359.3	359.3	359.3	142.1	132.9	142.1	2.53	266.5	266.5	266.5
36	361.6	361.6	361.6	139.0	129.9	139.0	2.60	263.1	263.1	263.1
35	363.8	363.8	363.8	135.9	127.1	135.9	2.68	259.8	259.8	259.8
34	366.0	366.0	366.0	132.9	124.3	132.9	2.75	256.6	256.6	256.6
33	368.0	368.0	368.0	130.0	121.5	130.0	2.83	253.4	253.4	253.4
32	370.1	370.1	370.1	127.2	118.9	127.2	2.91	250.3	250.3	250.3
31	372.0	372.0	372.0	124.4	116.3	124.4	2.99	247.3	247.3	247.3
30	373.9	373.9	373.9	121.7	113.7	121.7	3.07	244.4	244.4	244.4
29	375.7	375.7	375.7	119.0	111.2	119.0	3.16	241.6	241.6	241.6
28	377.5	377.5	377.5	116.4	108.8	116.4	3.24	238.7	238.7	238.7
27	379.2	379.2	379.2	113.8	106.4	113.8	3.33	236.0	236.0	236.0
26	380.8	380.8	380.8	111.3	104.1	111.3	3.42	233.3	233.3	233.3
25	382.4	382.4	382.4	108.9	101.8	108.9	3.51	230.6	230.6	230.6
24	383.9	383.9	383.9	106.5	99.6	106.5	3.60	228.0	228.0	228.0
23	385.3	385.3	385.3	104.1	97.3	104.1	3.70	225.4	225.4	225.4
22	386.7	386.7	386.7	101.8	95.2	101.8	3.80	222.8	222.8	222.8
21	388.1	388.1	388.1	99.5	93.0	99.5	3.90	220.3	220.3	220.3
20	389.3	389.3	389.3	97.3	90.9	97.3	4.00	217.8	217.8	217.8
19	390.6	390.6	390.6	95.1	88.9	95.1	4.11	215.3	215.3	215.3
18	391.7	391.7	391.7	92.9	86.8	92.9	4.22	212.7	212.7	212.7
17	392.8	392.8	392.8	90.7	84.8	90.7	4.33	210.2	210.2	210.2

Tc [°C]		W 23 / 18 °C								
Ta [°C]	Qc [kW]	Qh-min [kW]	Qh-max [kW]	Pin [kW]	Pin-min [kW]	Pin-max [kW]	EER kW / kW	I [A]	I-min [A]	I-max [A]
40	469.4	469.4	469.4	152.0	142.1	152.0	3.09	277.1	277.1	277.1
39	472.5	472.5	472.5	148.7	139.0	148.7	3.18	273.3	273.3	273.3
38	475.6	475.6	475.6	145.4	135.9	145.4	3.27	269.5	269.5	269.5
37	478.5	478.5	478.5	142.1	132.9	142.1	3.37	265.8	265.8	265.8
36	481.4	481.4	481.4	139.0	129.9	139.0	3.46	262.2	262.2	262.2
35	484.3	484.3	484.3	135.9	127.1	135.9	3.56	258.7	258.7	258.7
34	487.0	487.0	487.0	132.9	124.3	132.9	3.66	255.3	255.3	255.3
33	489.7	489.7	489.7	130.0	121.5	130.0	3.77	252.0	252.0	252.0
32	492.4	492.4	492.4	127.2	118.9	127.2	3.87	248.7	248.7	248.7
31	494.9	494.9	494.9	124.4	116.3	124.4	3.98	245.5	245.5	245.5
30	497.4	497.4	497.4	121.7	113.7	121.7	4.09	242.3	242.3	242.3
29	499.9	499.9	499.9	119.0	111.2	119.0	4.20	239.3	239.3	239.3
28	502.3	502.3	502.3	116.4	108.8	116.4	4.32	236.2	236.2	236.2
27	504.6	504.6	504.6	113.8	106.4	113.8	4.43	233.2	233.2	233.2
26	506.8	506.8	506.8	111.3	104.1	111.3	4.55	230.3	230.3	230.3
25	509.0	509.0	509.0	108.9	101.8	108.9	4.67	227.4	227.4	227.4
24	511.2	511.2	511.2	106.5	99.6	106.5	4.80	224.5	224.5	224.5
23	513.3	513.3	513.3	104.1	97.3	104.1	4.93	221.6	221.6	221.6
22	515.3	515.3	515.3	101.8	95.2	101.8	5.06	218.8	218.8	218.8
21	517.2	517.2	517.2	99.5	93.0	99.5	5.20	216.0	216.0	216.0
20	519.1	519.1	519.1	97.3	90.9	97.3	5.34	213.2	213.2	213.2
19	521.0	521.0	521.0	95.1	88.9	95.1	5.48	210.3	210.3	210.3
18	522.8	522.8	522.8	92.9	86.8	92.9	5.63	207.5	207.5	207.5
17	524.5	524.5	524.5	90.7	84.8	90.7	5.78	204.7	204.7	204.7

* attention: operating limits not reflected in performance table



LEGENDE:

Ts-IN: Temperature renewable source - inlet [°C]
Th-OU: Temperature heating - outlet (flow) [°C]
Tc-OU: Temperature cooling - outlet (flow) [°C]
Qh nom: Heating capacity nominal
Qh min: Heating capacity minimal
Qh max: Heating capacity maximal
Pin nom: Power input at nominal heating capacity
Pin min: Power input at minimal heating capacity
Pin max: Power input at maximal heating capacity
COP nom: coefficient of performance at nominal heating capacity
Qc nom: cooling / heat extraction capacity at nominal heating capacity
Qc min: cooling / heat extraction at minimal heating capacity
Qc max: cooling / heat extraction at maximal heating capacity
I nom: Current at nominal heating capacity
EER: energy efficiency ratio at nominal cooling capacity

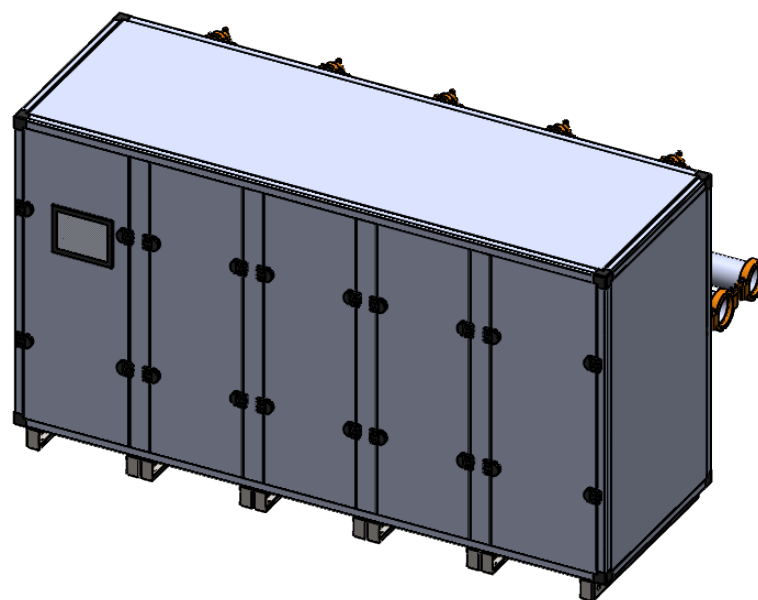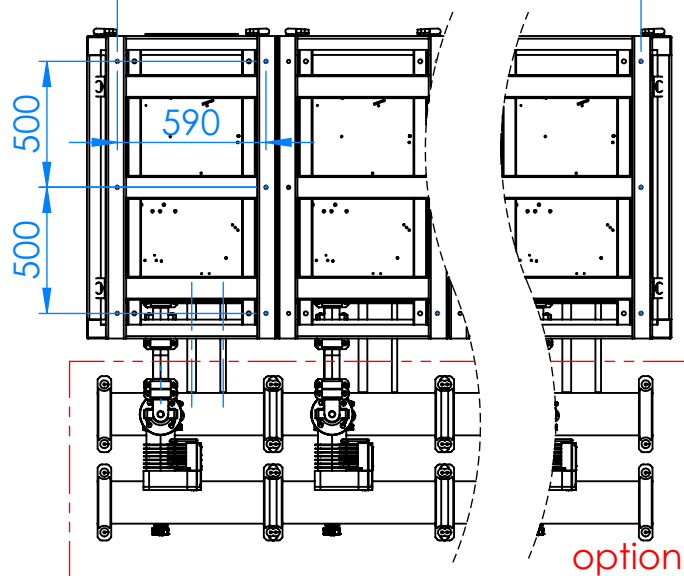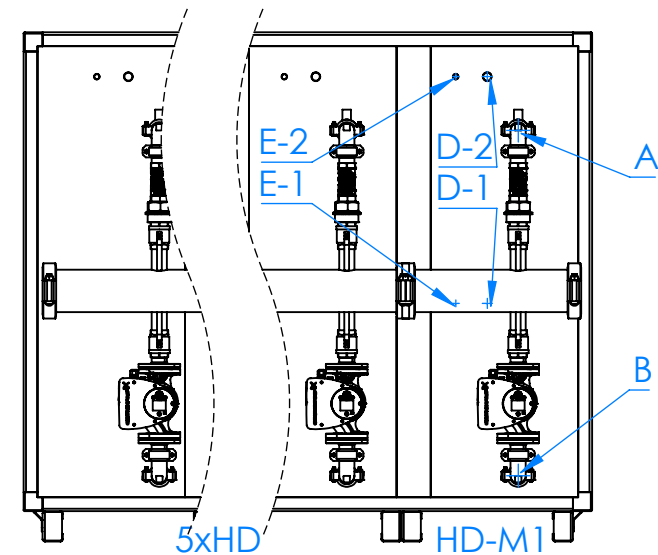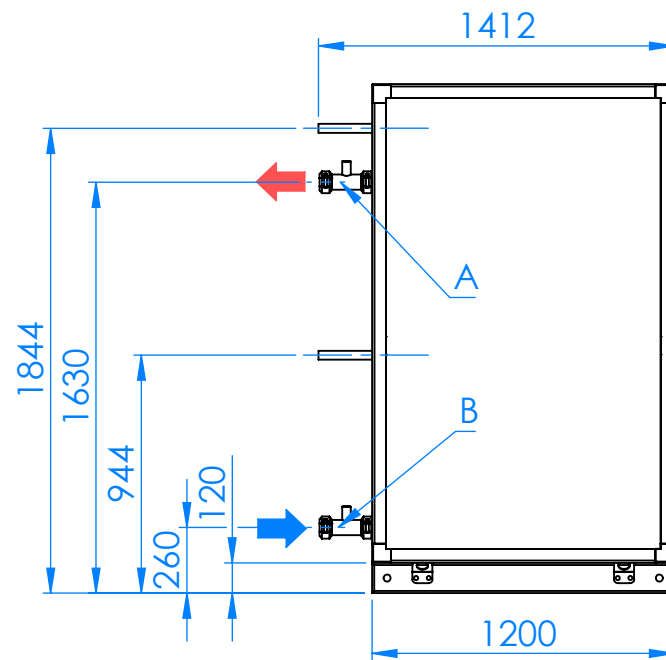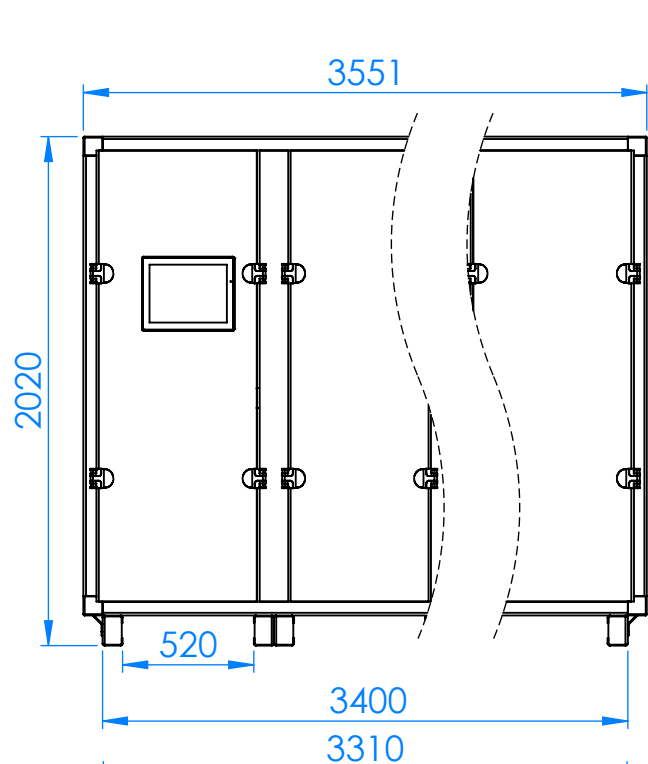

D (1,2,x) - SPLIT - FRIGO GAS
(Modul 1-2-x)


E (1,2,x) - SPLIT - FRIGO LIQUID
(Modul 1-2-x)

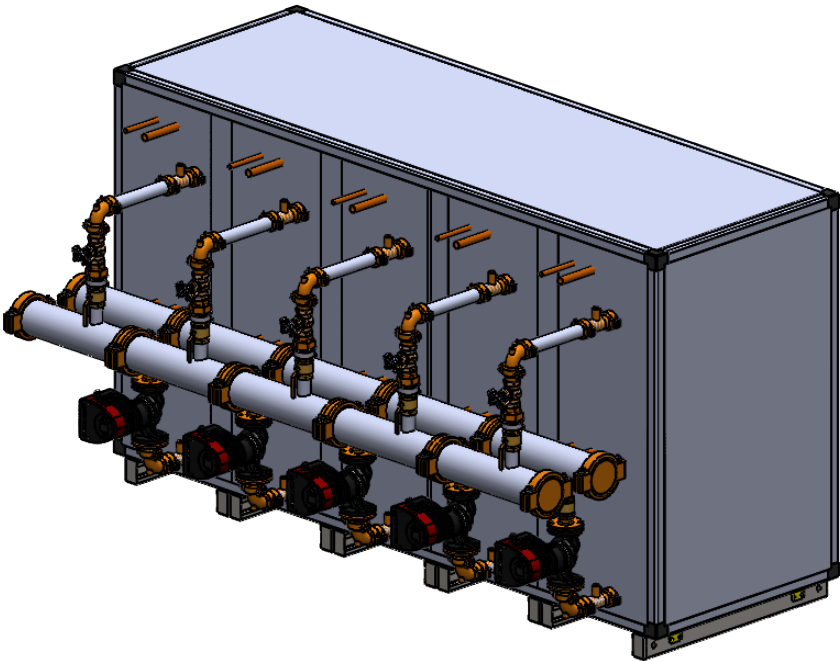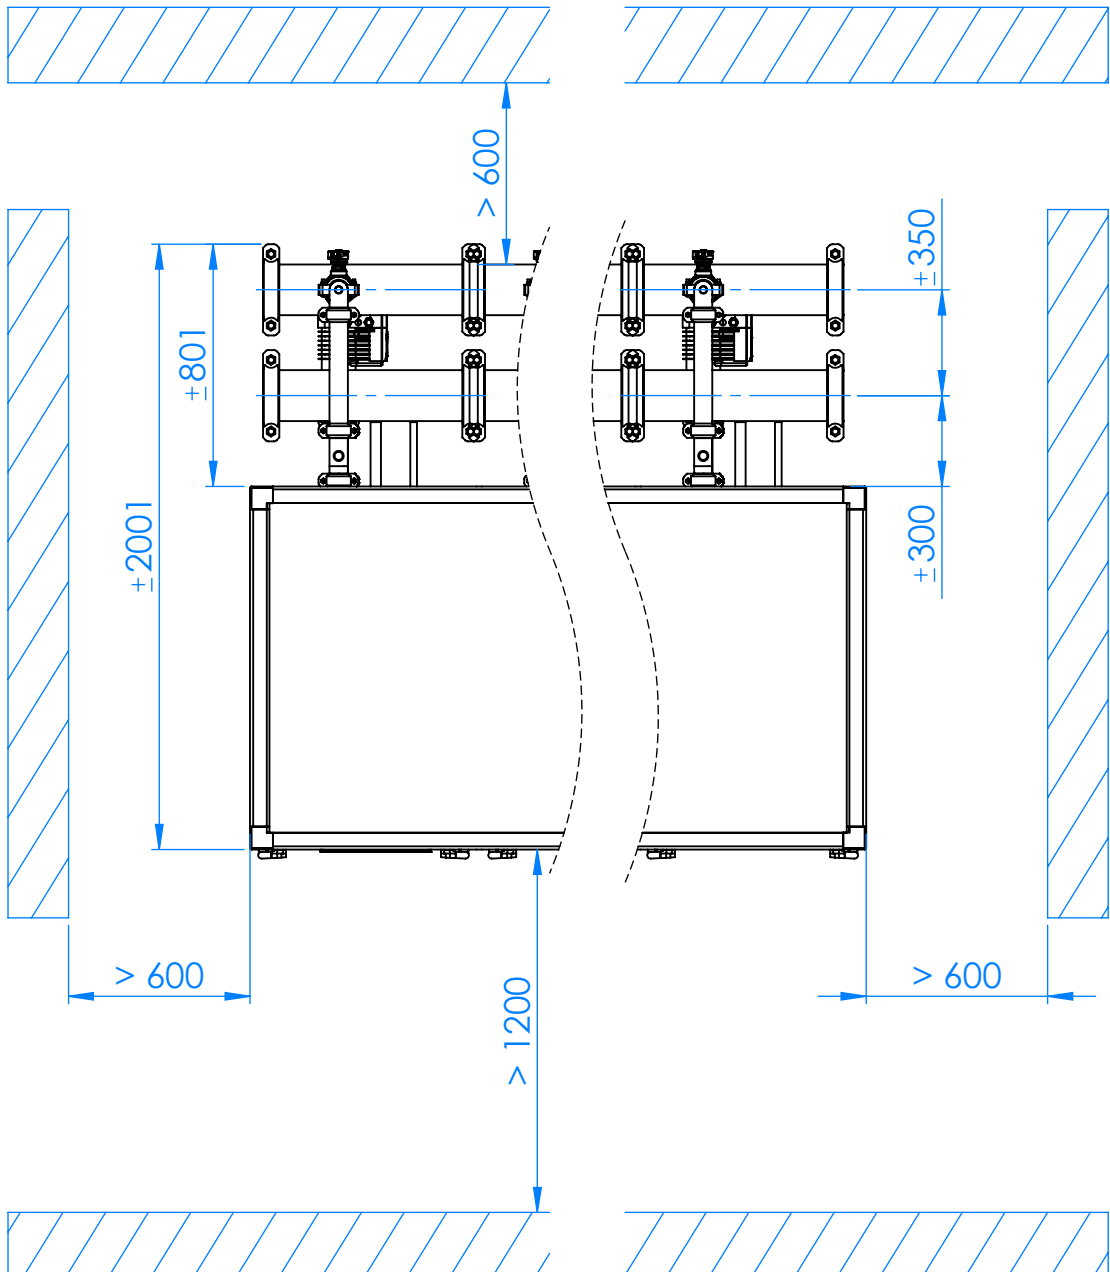

WAMAK AW 500 EVI HeavyDuty 2L5 - Split unit variant: VOV900X2-FRAME

Number of units needed




5

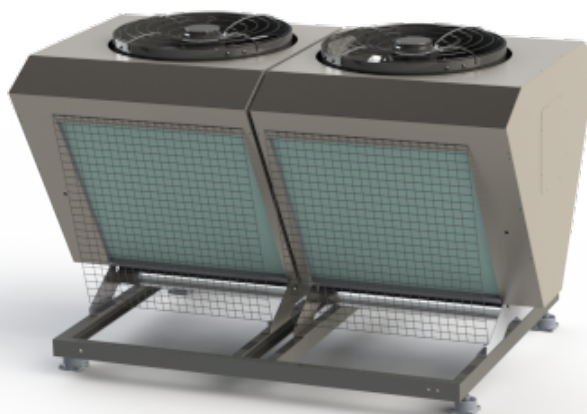

Enclosure type: VOV900X2-FRAME			Evaporator	
Article	WAVV2X90		Type	Cu-coil /Al-fin "
Basic dimensions	Height [mm]	1400	Port size	10 x (7/8" - 1.3/8") "
	Width [mm]	1500	Heat transfer medium	Air
	Length [mm]	2300	Volume flow - Air [m3/h]	15072 ~ 150720
Weight [kg]	430		Internal pressure drop - Air [kPa]	10 x 0.061
Colour	Inox		Temperature difference - Air	7 K
Enclosure IP Class	IP44		Expansion valve	EEV
Fan	800 mm			
Number of fans	2		Fan mounting position	Vertical axis
Fan motor type	EC		Fan type	Axial
Fan nominal current [A]	1.35		Fan power supply [V/Hz]	3~ 400/50
Minimal fan power input [Watt]	81		Maximal fan power input [Watt]	802


Acoustic power Lw

82.3 dB(A)






Distance [m]	1	5	10	15	1	5	10	15	1	5	10	15
Acoustic pressure Lp [dB(A)]	77.3	63.3	57.3	53.8	80.3	66.3	60.3	56.8	74.3	60.3	54.3	50.8




EC Fan 800mm

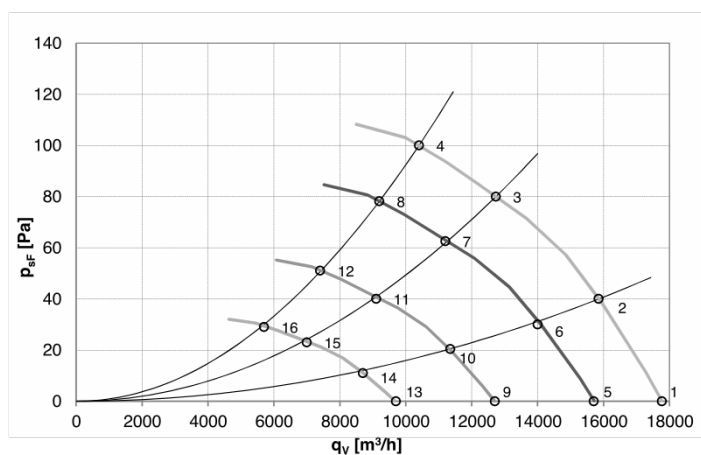

	U	f	n	qv	PstF	Po	I	LwA out	Ta max
	[V]	[Hz]	[RPM]	[m³/h]	[Pa]	[W]	[A]	[dB (A)]	[°C]
1	400	50	735	17770	0	503	0,85	70	60
2	400	50	735	15850	40	612	1,02	66	60
3	400	50	735	12730	80	735	1,18	65	60
4	400	50	735	10400	100	802	1,36	68	60
5	400	50	650	15700	0	348	0,68	67	60
6	400	50	650	14000	30	421	0,80	63	60
7	400	50	650	11200	63	510	0,92	62	60
8	400	50	650	9200	78	554	0,93	65	60
9	400	50	525	12700	0	183	0,38	63	60
10	400	50	525	11350	20	225	0,35	59	60
11	400	50	525	9100	40	265	0,53	58	60
12	400	50	525	7400	51	292	0,57	61	60
13	400	50	400	9700	0	81	0,21	57	60
14	400	50	400	8700	11	97	0,24	53	60
15	400	50	400	7000	23	117	0,27	52	60
16	400	50	400	5700	29	128	0,28	55	60

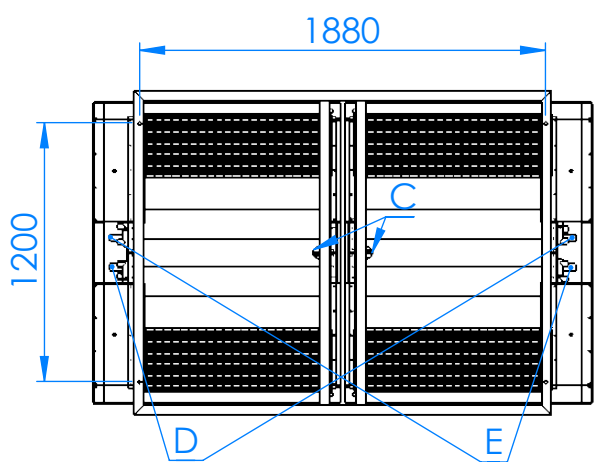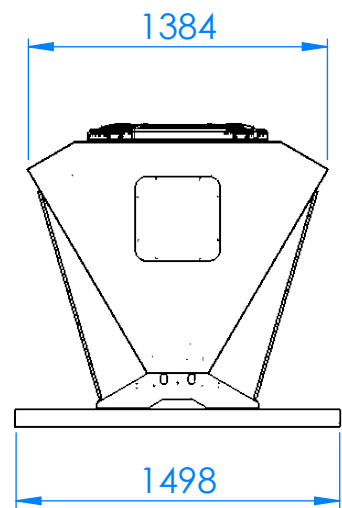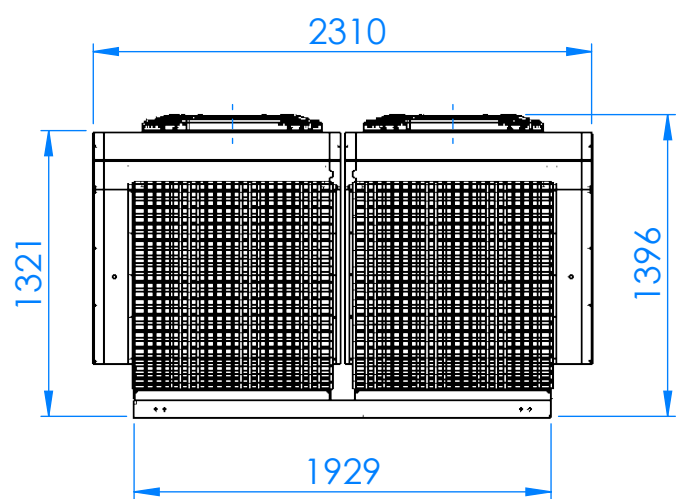


D - FRIGO GAS
E - FRIGO LIQUID
C - CONDENS

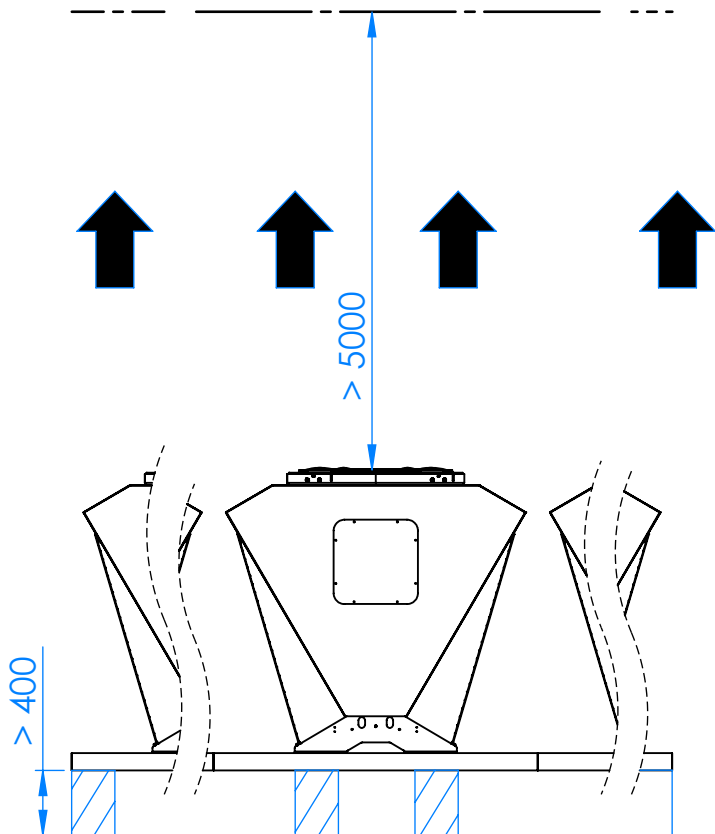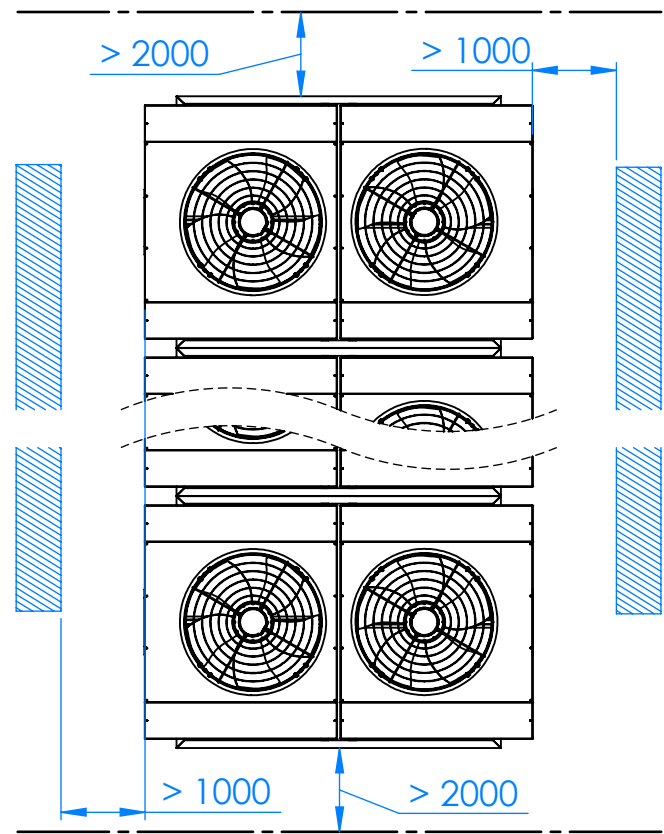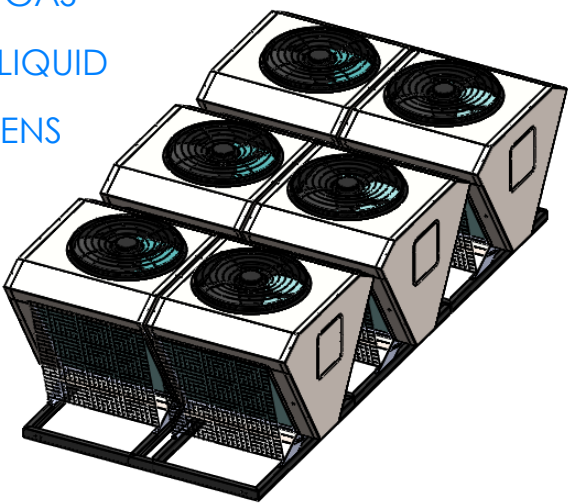

WAMAK AW 500 EVI HeavyDuty 2L5 - Split unit variant: VOII-1200-2LOW

Number of units needed




10

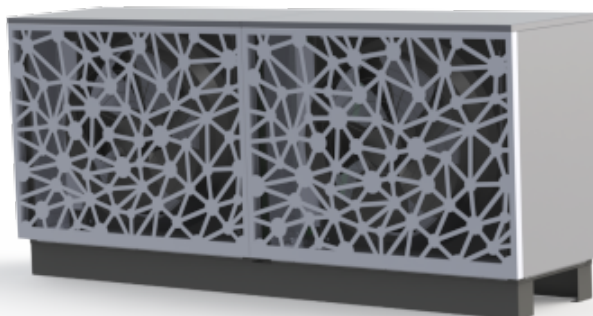

Enclosure type: VOII-1200-2LOW			Evaporator	
Article	WAVII12L		Type	Cu-coil /Al-fin "
Basic dimensions	Height [mm]	1240	Port size	10 x (7/8" - 1.3/8") "
	Width [mm]	2850	Heat transfer medium	Air
	Length [mm]	710	Volume flow - Air [m3/h]	15072 ~ 150720
Weight [kg]	300		Internal pressure drop - Air [kPa]	10 x 0.061
Colour	Gray		Temperature difference - Air	7 K
Enclosure IP Class	IP44		Expansion valve	EEV
Fan	800 mm			
Number of fans	2		Fan mounting position	Horizontal axis
Fan motor type	EC		Fan type	Axial
Fan nominal current [A]	1.35		Fan power supply [V/Hz]	3~ 400/50
Minimal fan power input [Watt]	81		Maximal fan power input [Watt]	802


Acoustic power Lw

78.8 dB(A)





Distance [m]	1	5	10	15	1	5	10	15	1	5	10	15
Acoustic pressure Lp [dB(A)]	73.8	59.8	53.8	50.3	76.8	62.8	56.8	53.3	70.8	56.8	50.8	47.3

EC Fan 800mm

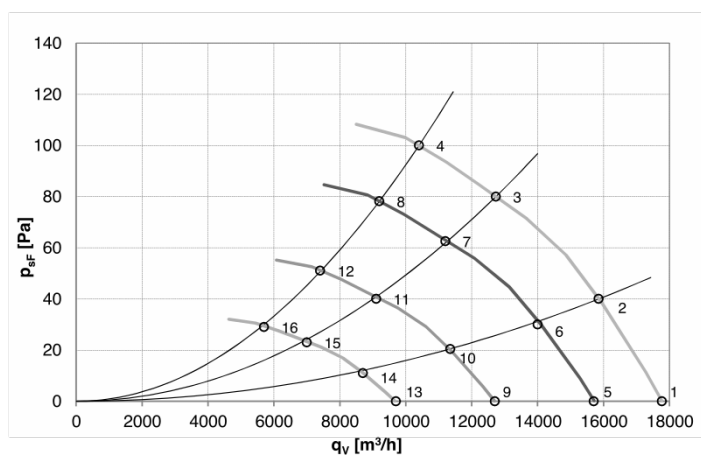


	U	f	n	qv	Pst	Pe	I	LwA out	Ta max
	[V]	[Hz]	[RPM]	[m³/h]	[Pa]	[W]	[A]	[dB (A)]	[°C]
1	400	50	735	17770	0	503	0,85	70	60
2	400	50	735	15850	40	612	1,02	66	60
3	400	50	735	12730	80	735	1,18	65	60
4	400	50	735	10400	100	802	1,36	68	60
5	400	50	650	15700	0	348	0,68	67	60
6	400	50	650	14000	30	421	0,80	63	60
7	400	50	650	11200	63	510	0,92	62	60
8	400	50	650	9200	78	554	0,93	65	60
9	400	50	525	12700	0	183	0,38	63	60
10	400	50	525	11350	20	225	0,35	59	60
11	400	50	525	9100	40	265	0,53	58	60
12	400	50	525	7400	51	292	0,57	61	60
13	400	50	400	9700	0	81	0,21	57	60
14	400	50	400	8700	11	97	0,24	53	60
15	400	50	400	7000	23	117	0,27	52	60
16	400	50	400	5700	29	128	0,28	55	60

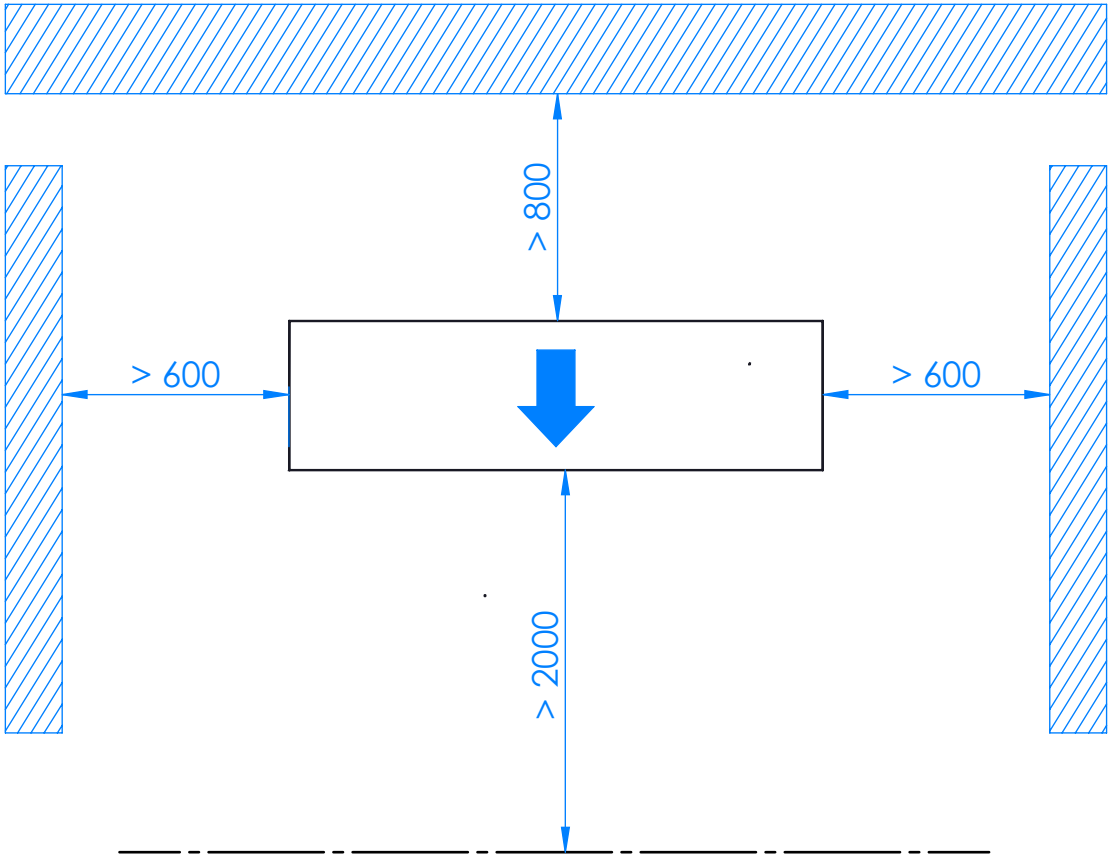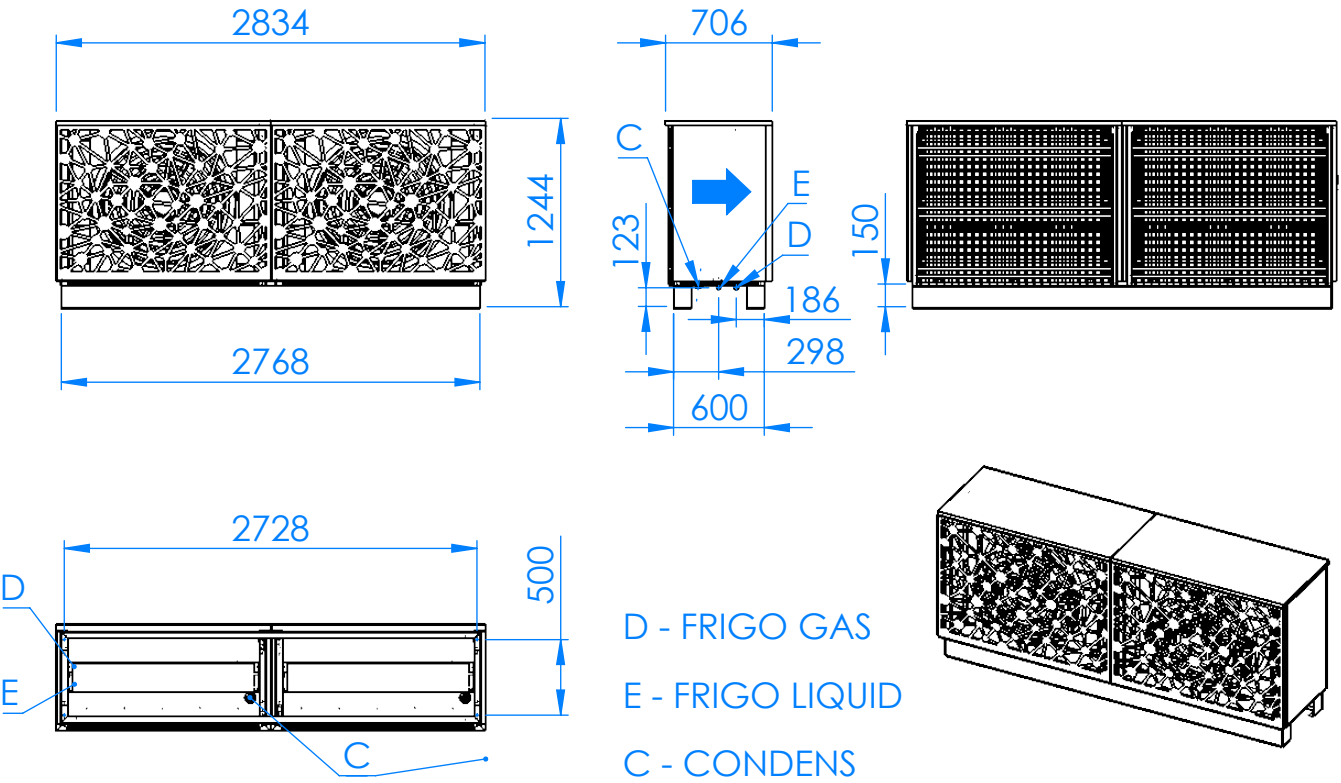

WAMAK AW 500 EVI HeavyDuty 2L5 - Split unit variant: VOII-1200-2HIGH

Number of units needed




10

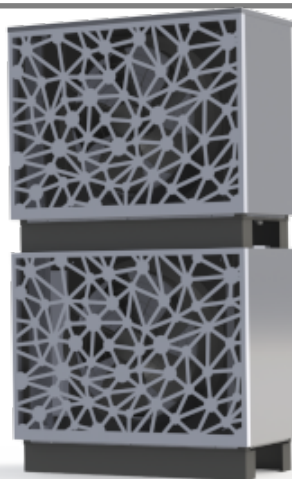

Enclosure type: VOII-1200-2HIGH			Evaporator	
Article	WAVII12H		Type	Cu-coil /Al-fin "
Basic dimensions	Height [mm]	2450	Port size	10 x (7/8" - 1.3/8") "
	Width [mm]	1420	Heat transfer medium	Air
	Length [mm]	710	Volume flow - Air [m3/h]	15072 ~ 150720
Weight [kg]	300		Internal pressure drop - Air [kPa]	10 x 0.061
Colour	Gray		Temperature difference - Air	7 K
Enclosure IP Class	IP44		Expansion valve	EEV
Fan	800 mm			
Number of fans	2		Fan mounting position	Horizontal axis
Fan motor type	EC		Fan type	Axial
Fan nominal current [A]	1.35		Fan power supply [V/Hz]	3~ 400/50
Minimal fan power input [Watt]	81		Maximal fan power input [Watt]	802


Acoustic power Lw

78.8 dB(A)




Distance [m]	1	5	10	15	1	5	10	15	1	5	10	15
Acoustic pressure Lp [dB(A)]	73.8	59.8	53.8	50.3	76.8	62.8	56.8	53.3	70.8	56.8	50.8	47.3

EC Fan 800mm

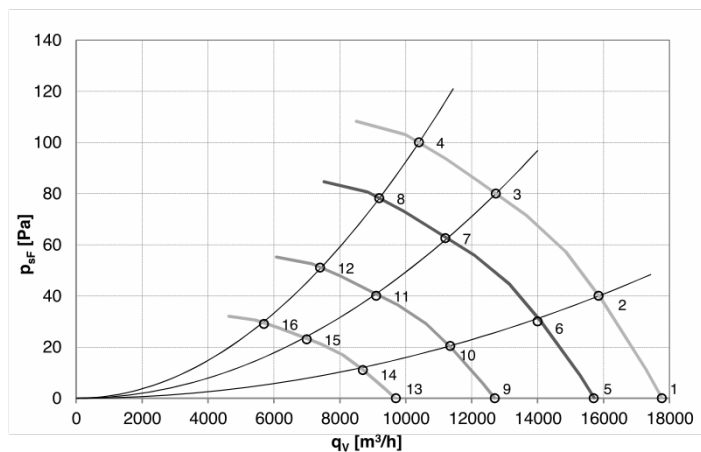


	U	f	n	qv	Pst	Pe	I	LwA out	Ta max
	[V]	[Hz]	[RPM]	[m³/h]	[Pa]	[W]	[A]	[dB (A)]	[°C]
1	400	50	735	17770	0	503	0,85	70	60
2	400	50	735	15850	40	612	1,02	66	60
3	400	50	735	12730	80	735	1,18	65	60
4	400	50	735	10400	100	802	1,36	68	60
5	400	50	650	15700	0	348	0,68	67	60
6	400	50	650	14000	30	421	0,80	63	60
7	400	50	650	11200	63	510	0,92	62	60
8	400	50	650	9200	78	554	0,93	65	60
9	400	50	525	12700	0	183	0,38	63	60
10	400	50	525	11350	20	225	0,35	59	60
11	400	50	525	9100	40	265	0,53	58	60
12	400	50	525	7400	51	292	0,57	61	60
13	400	50	400	9700	0	81	0,21	57	60
14	400	50	400	8700	11	97	0,24	53	60
15	400	50	400	7000	23	117	0,27	52	60
16	400	50	400	5700	29	128	0,28	55	60

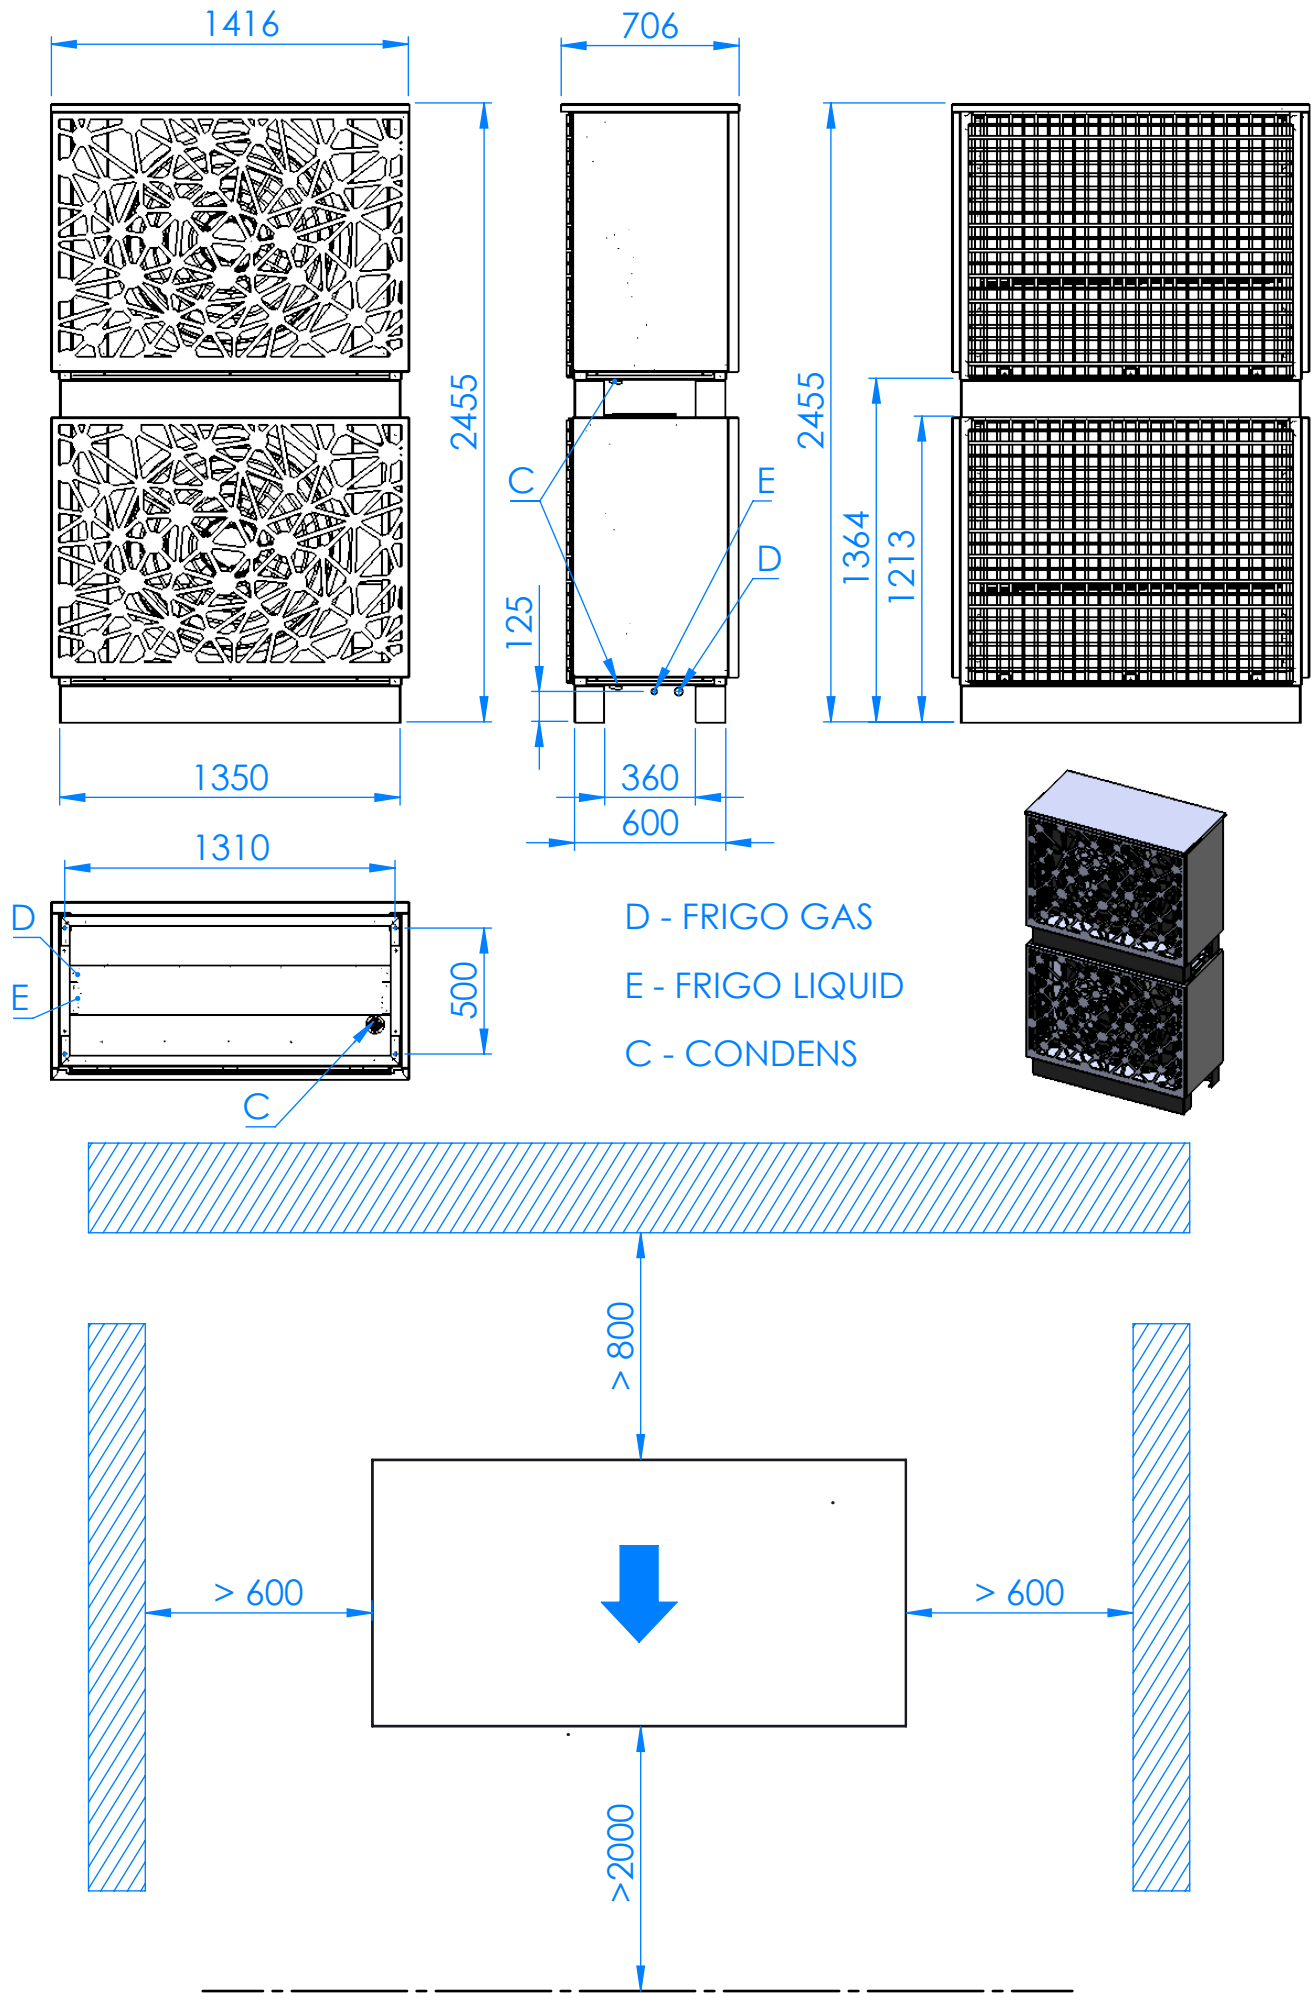

WAMAK AW 500 EVI HeavyDuty 2L5 - Split unit variant: VOII-1200-2LOW-DUCT

Number of units needed




10

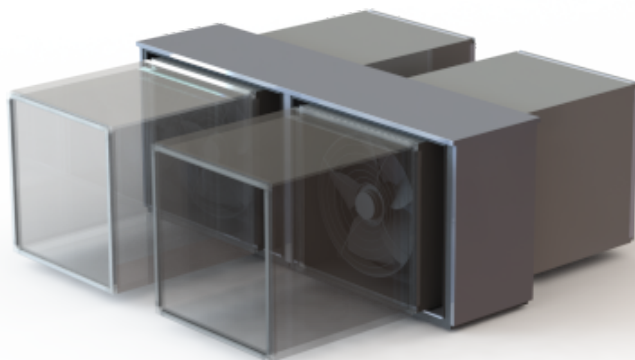

Enclosure type: VOII-1200-2LOW-DUCT			Evaporator	
Article	WAVID12L		Type	Cu-coil /Al-fin "
Basic dimensions	Height [mm]	1240	Port size	10 x (7/8" - 1.3/8") "
	Width [mm]	2850	Heat transfer medium	Air
	Length [mm]	710	Volume flow - Air [m3/h]	15072 ~ 150720
Weight [kg]	300		Internal pressure drop - Air [kPa]	10 x 0.061
Colour	Gray		Temperature difference - Air	7 K
Enclosure IP Class	IP44		Expansion valve	EEV
Fan	800 mm			
Number of fans	2		Fan mounting position	Horizontal axis
Fan motor type	EC		Fan type	Axial
Fan nominal current [A]	1.35		Fan power supply [V/Hz]	3~ 400/50
Minimal fan power input [Watt]	81		Maximal fan power input [Watt]	802


Acoustic power Lw

78.8 dB(A)



Distance [m]	1	5	10	15	1	5	10	15	1	5	10	15
Acoustic pressure Lp [dB(A)]	73.8	59.8	53.8	50.3	76.8	62.8	56.8	53.3	70.8	56.8	50.8	47.3

EC Fan 800mm

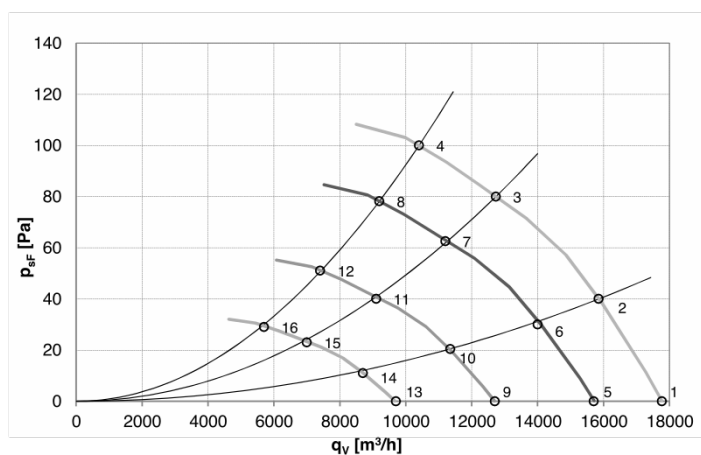


	U	f	n	qv	Pst	Pe	I	LwA out	Ta max
	[V]	[Hz]	[RPM]	[m³/h]	[Pa]	[W]	[A]	[dB (A)]	[°C]
1	400	50	735	17770	0	503	0,85	70	60
2	400	50	735	15850	40	612	1,02	66	60
3	400	50	735	12730	80	735	1,18	65	60
4	400	50	735	10400	100	802	1,36	68	60
5	400	50	650	15700	0	348	0,68	67	60
6	400	50	650	14000	30	421	0,80	63	60
7	400	50	650	11200	63	510	0,92	62	60
8	400	50	650	9200	78	554	0,93	65	60
9	400	50	525	12700	0	183	0,38	63	60
10	400	50	525	11350	20	225	0,35	59	60
11	400	50	525	9100	40	265	0,53	58	60
12	400	50	525	7400	51	292	0,57	61	60
13	400	50	400	9700	0	81	0,21	57	60
14	400	50	400	8700	11	97	0,24	53	60
15	400	50	400	7000	23	117	0,27	52	60
16	400	50	400	5700	29	128	0,28	55	60

WAMAK AW 500 EVI HeavyDuty 2L5 - Split unit variant: VOII-1200-2HIGH-DUCT

Number of units needed




10

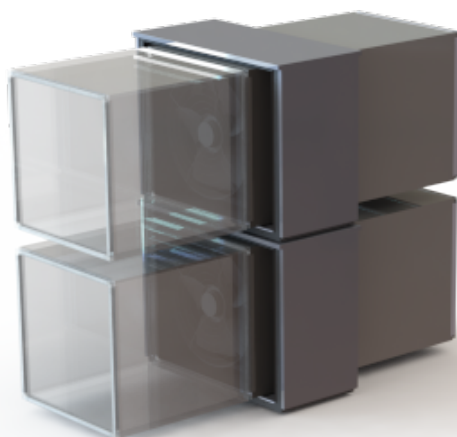

Enclosure type: VOII-1200-2HIGH-DUCT			Evaporator	
Article	WAVID12H		Type	Cu-coil /Al-fin "
Basic dimensions	Height [mm]	2450	Port size	10 x (7/8" - 1.3/8") "
	Width [mm]	1420	Heat transfer medium	Air
	Length [mm]	710	Volume flow - Air [m3/h]	15072 ~ 150720
Weight [kg]	300		Internal pressure drop - Air [kPa]	10 x 0.061
Colour	Gray		Temperature difference - Air	7 K
Enclosure IP Class	IP44		Expansion valve	EEV
Fan	800 mm			
Number of fans	2		Fan mounting position	Horizontal axis
Fan motor type	EC		Fan type	Axial
Fan nominal current [A]	1.35		Fan power supply [V/Hz]	3~ 400/50
Minimal fan power input [Watt]	81		Maximal fan power input [Watt]	802


Acoustic power Lw

78.8 dB(A)



Distance [m]	1	5	10	15	1	5	10	15	1	5	10	15
Acoustic pressure Lp [dB(A)]	73.8	59.8	53.8	50.3	76.8	62.8	56.8	53.3	70.8	56.8	50.8	47.3

EC Fan 800mm

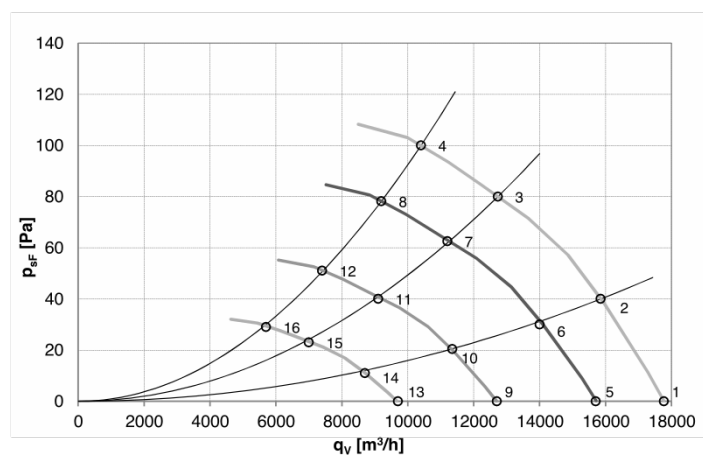

	U	f	n	qv	Pst	Pe	I	LwA out	Ta max
	[V]	[Hz]	[RPM]	[m³/h]	[Pa]	[W]	[A]	[dB (A)]	[°C]
1	400	50	735	17770	0	503	0,85	70	60
2	400	50	735	15850	40	612	1,02	66	60
3	400	50	735	12730	80	735	1,18	65	60
4	400	50	735	10400	100	802	1,36	68	60
5	400	50	650	15700	0	348	0,68	67	60
6	400	50	650	14000	30	421	0,80	63	60
7	400	50	650	11200	63	510	0,92	62	60
8	400	50	650	9200	78	554	0,93	65	60
9	400	50	525	12700	0	183	0,38	63	60
10	400	50	525	11350	20	225	0,35	59	60
11	400	50	525	9100	40	265	0,53	58	60
12	400	50	525	7400	51	292	0,57	61	60
13	400	50	400	9700	0	81	0,21	57	60
14	400	50	400	8700	11	97	0,24	53	60
15	400	50	400	7000	23	117	0,27	52	60
16	400	50	400	5700	29	128	0,28	55	60

